

# APPENDIX 3.5-A: PRECONSTRUCTION ELECTROMAGNETIC MEASUREMENT SURVEY ALONG THE SAN JOSE TO MERCED PROJECT SECTION



# **CONTENTS**

APPENDIX 3.5-A: PRECONSTRUCTION ELECTROMAGNETIC	
MEASUREMENT SURVEY ALONG THE SAN JOSE TO MERCED	
PROJECT SECTION	
Introduction	
Test Procedures and Equipment  Overview of the Measurement Results	
Magnetic Fields	
Electric Fields	
Individual Site Observations	3.5-A-9
Site 1 (Newhall Street / Newhall Drive)	
Site 2 (Montgomery Street / Otterson Street)	
Site 3 (Communications Hill Boulevard / Curtner Avenue)	
Site 4 (Great Oaks Parkway / Las Colinas Road)	
Site 5 (Metcalf Road / Coyote Ranch Road)	
Site 7 (Monterey Highway / Las Animas Avenue)	
Site 8 (State Route 152 / Casa de Fruta Parkway)	
Site 9 (Santa Nella Avenue / Fahey Road)	
Site 10 (Henry Miller Road / Carlucci Road)	
Site Photographs and Measurement Data	3.5-A-10
Figure 1 Average Measured AC Magnetic Field Strengths	
Figure 2 Maximum Electric Field Strengths by Frequency Band	3.5-A-7
Figure 3 Variation in Measured Maximum Electric Field Strengths	3.5-A-8
Figure 4 Maximum Measured Electric Field Strengths	3.5-A-9
Figure 5(a) Location 1: Newhall Street / Newhall Drive, San Jose	3.5-A-11
Figure 5(b) Location 1: Measurement Location and Site Views	3.5-A-12
Figure 5(c) Location 1: Local EMF Sources	
Figure 5(d) Location 1: AC and DC Magnetic Field Measurement Results	3.5-A-14
Figure 5(e) Location 1: Measured Environmental RF Levels	3.5-A-15
Figure 5(f) Location 1: Measured Environmental RF Levels	
Figure 5(g) Location 1: Measured Environmental RF Levels	3.5-A-17
Figure 5(h) Location 1: Measured Environmental RF Levels	3.5-A-18
Figure 6(a) Location 2: Montgomery Street / Otterson Street, San Jose	3.5-A-19
Figure 6(b) Location 2: Measurement Location and Site Views	3.5-A-20
Figure 6(c) Location 2: Local EMF Sources	3.5-A-21
Figure 6(d) Location 2: AC and DC Magnetic Field Measurement Results	3.5-A-22
Figure 6(e) Location 2: Measured Environmental RF Levels	
Figure 6(f) Location 2: Measured Environmental RF Levels	
Figure 6(g) Location 2: Measured Environmental RF Levels	
Figure 6(h) Location 2: Measured Environmental RF Levels	
2.00	0.0 / . 20



Figure 7(a) Location 3: Communications Hill Boulevard/Monte Vista Drive, San	
Jose	
Figure 7(b) Location 3: Measurement Location and Site Views	
Figure 7(c) Location 3: Local EMF Sources	
Figure 7(d) Location 3: Measured DC and AC Magnetic Field Strengths	3.5-A-30
Figure 7(e) Location 3: Measured Environmental RF Levels Non-Directional	0.5.4.04
Data from Vertically Oriented Monopole Antenna, Bands 0-4	
Figure 7(f) Location 3: Measured Environmental RF Levels Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation	. 3.5-A-32
Figure 7(g) Location 3: Measured Environmental RF Levels Band 6 Vertical an Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation	
Figure 7(h) Location 3: Measured Environmental RF Levels Band 7 Vertical an Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation	
Figure 8(a) Location 4: Great Oaks Parkway/Las Colinas Road, San Jose	
Figure 8(b) Location 4: Measurement Location and Site Views	
Figure 8(c) Location 4: Local EMF Sources	
Figure 8(d) Location 4: AC and DC Magnetic Field Measurement Results	
Figure 8(e) Location 4: Measured Environmental RF Levels Non-Directional	
Data from Vertically Oriented Monopole Antenna, Bands 0-4	3.5-A-39
Figure 8(f) Location 4: Measured Environmental RF Levels	3.5-A-40
Figure 8(g) Location 4: Measured Environmental RF Levels	3.5-A-41
Figure 8(h) Location 4: Measured Environmental RF Levels	3.5-A-42
Figure 9(a) Location 5: Metcalf Energy Center, San Jose	3.5-A-43
Figure 9(b) Location 5: Measurement Location and Site Views	3.5-A-44
Figure 9(c) Location 5: Local EMF Sources	3.5-A-45
Figure 9(d) Location 5: AC and DC Magnetic Field Measurement Results	3.5-A-46
Figure 9(e) Location 5: Measured Environmental RF Levels	3.5-A-47
Figure 9(f) Location 5: Measured Environmental RF Levels	3.5-A-48
Figure 9(g) Location 5: Measured Environmental RF Levels	3.5-A-49
Figure 9(h) Location 5: Measured Environmental RF Levels	3.5-A-50
Figure 10(a) Location 6: Railroad Avenue/Barrett Avenue, Morgan Hill	3.5-A-51
Figure 10(b) Location 6: Measurement Location and Site Views	3.5-A-52
Figure 10(c) Location 6: Local EMF Sources	3.5-A-53
Figure 10(d) Location 6: AC and DC Magnetic Field Measurement Results	3.5-A-54
Figure 10(e) Location 6: Measured Environmental RF Levels	3.5-A-55
Figure 10(f) Location 6: Measured Environmental RF Levels	3.5-A-56
Figure 10(g) Location 6: Measured Environmental RF Levels	3.5-A-57
Figure 10(h) Location 6: Measured Environmental RF Levels	3.5-A-58
Figure 11(a) Location 7: Monterey Highway/Las Animas Avenue, Gilroy	3.5-A-59
Figure 11(b) Location 7: Measurement Location and Site Views	3.5-A-60
Figure 11(c) Location 7: Local EMF Sources	3.5-A-61
Figure 11(d) Location 7: AC and DC Magnetic Field Measurement Results	3.5-A-62



Figure 11(e) Location 7: Measured Environmental RF Levels	3.5-A-63
Figure 11(f) Location 7: Measured Environmental RF Levels	3.5-A-64
Figure 11(g) Location 7: Measured Environmental RF Levels	3.5-A-65
Figure 11(h) Location 7: Measured Environmental RF Levels	3.5-A-66
Figure 12(a) Location 8: SR 152/Casa de Fruta Parkway, Hollister	3.5-A-67
Figure 12(b) Location 8: Measurement Location and Site Views	3.5-A-68
Figure 12(c) Location 8: AC and DC Magnetic Field Measurement Results	3.5-A-69
Figure 12(d) Location 8: Measured Environmental RF Levels	3.5-A-70
Figure 12(e) Location 8: Measured Environmental RF Levels	3.5-A-71
Figure 12(f) Location 8: Measured Environmental RF Levels	3.5-A-72
Figure 12(h) Location 8: Measured Environmental RF Levels	3.5-A-73
Figure 13(a) Location 9: Santa Nella Avenue/Fahey Road, Santa Nella	3.5-A-74
Figure 13(b) Location 9: Measurement Location and Site Views	3.5-A-75
Figure 13(c) Location 9: Local EMF Sources	3.5-A-76
Figure 13(d) Location 9: AC and DC Magnetic Field Measurement Results	3.5-A-77
Figure 13(e) Location 9: Measured Environmental RF Levels	3.5-A-78
Figure 13(f) Location 9: Measured Environmental RF Levels	3.5-A-79
Figure 13(g) Location 9: Measured Environmental RF Levels	3.5-A-80
Figure 13(h) Location 9: Measured Environmental RF Levels	3.5-A-81
Figure 14(a) Location 10: Henry Miller Road/Carlucci Road, Dos Palos	3.5-A-82
Figure 14(b) Location 10: Measurement Location and Site Views	3.5-A-83
Figure 14(c) Location 10: Local EMF sources	3.5-A-84
Figure 14(d) Location 10: AC and DC Magnetic Field Measurement Results	3.5-A-85
Figure 14(e) Location 10: Measured Environmental RF Levels	3.5-A-86
Figure 14(f) Location 10: Measured Environmental RF Levels	3.5-A-87
Figure 14(g) Location 10: Measured Environmental RF Levels	3.5-A-88
Figure 14(h) Location 10: Measured Environmental RF Levels	3 5-4-80



#### Introduction

This appendix documents measurement results from a preconstruction electromagnetic survey of locations along the San Jose to Carlucci project extent corridor. The purpose of the survey was to: (1) provide a baseline characterization of the existing electromagnetic environment, (2) allow comparisons with the expected electromagnetic footprint from the planned California High-Speed Rail (HSR) system, and (3) provide guidance for electromagnetic compatibility (EMC) requirements by defining the typical electromagnetic environment that the HSR system must operate in without interference.

Land uses, existing facilities, and infrastructure along the alignment were reviewed, with a list of approximately 30 candidate sites evaluated. This review concentrated on identifying potentially electromagnetic interference (EMI)-sensitive facilities, as well as existing electromagnetic field (EMF) sources such as power generation, power distribution, and communications facilities. The selection criteria, taken from Technical Memorandum (TM) 3.4.11, Measurement Procedure for Assessment of CHSTP Alignment EMI Footprint, favored providing a balanced coverage of:

- The geographic extent of the segment
- High-emission sites
- Low-emission sites
- Sites with high-sensitivity receptors

A final group consisting of 10 sites was selected based upon the above considerations and to provide representative coverage of land uses. Two types of measurements were performed at each location. The first involved measurement of radiated electric fields from 10 kilohertz (kHz) to 6 gigahertz (GHz), meant to characterize the radio-frequency (RF) environment. These electric field strengths were measured using an RF spectrum analyzer and calibrated antennas. Expected sources of RF signals included:

- Cell towers (cellular telephone)
- Broadcast towers (radio and television broadcasts)
- Airport radars and aircraft communications equipment
- General high-frequency and very-high-frequency fixed and mobile communications systems (e.g., police, fire, emergency medical technician, utilities, and government)
- Local wireless (wireless fidelity [WiFi] and Worldwide Interoperability for Microwave Access [WiMAX])

The second part of the test procedure involved measurements of background direct current (DC) and power frequency magnetic fields along the alignment. These magnetic fields were recorded using a three-axis fluxgate sensor with a waveform recording data acquisition system. Expected sources of DC and low-frequency magnetic fields included:

- The geomagnetic field
- High-voltage transmission lines
- Electric distribution lines
- Traction power distribution facilities
- Geomagnetic perturbations due to passing vehicles and trains

The facilities most sensitive to shifts in the DC (geomagnetic perturbations) and alternating current (AC) magnetic fields are:

- High technology semiconductor (e.g., electron microscopes [transmission electron microscopes/scanning electron microscopes], electron-beam lithography, ion-writing systems, focused ion-beam systems)
- High technology biology (e.g., nuclear magnetic resonance, magnetic resonance imaging [MRI], electron microscopes)



- Medical imaging (e.g., computed tomography [CT] scanners, MRI systems)
- University/research (instrumentation for chemistry, physics, electrical engineering, and similar systems to those mentioned for high technology and medical facilities).

# **Test Procedures and Equipment**

Analysts characterized the RF environment along the project extent by measuring the prevailing electric field strength at each of the 10 test sites, over the frequency range from 10 kHz to 6 GHz. The RF and magnetic field measurements were performed between July 18, 2016, and July 22, 2016. Measurements were made using a vertical monopole antenna (AH Systems SAS-550-1) for the frequency range from 10 kHz to 30 MHz and a broadband bilogical antenna (AH Systems SAS-521-7) for the frequency range from 25 MHz to 6 GHz, connected to an Anritsu MS2721B Spectrum Analyzer. Measurements were made in eight contiguous frequency bands and recorded per Section 6.4 of TM 3.4.11. Where practical, the RF antennas were located approximately 50 feet from the proposed alignment.

Electric field measurement files from the spectrum analyzer include both min-hold and max-hold levels as a function of frequency across each of the measurement bands, and a complete file set will be preserved for each measurement location. Reported results include the low-frequency measurements with the omni-directional vertical monopole, plus measurements with the bilogical antenna in both horizontal and vertical positions, first facing the proposed alignment, and then in the direction that exhibited the maximum signal strength in each measurement band.

The magnetic field measurements characterized the prevailing background magnetic field levels, as well as the temporal variations caused by the passing of trains on the existing right-of-way. Measurements were made at two positions at each site, separated by approximately 30 feet. The magnetic field measurements were performed using a pair of three-axis 5 gauss Bartington fluxgate sensors (bandwidth DC to 3 kHz), connected to a National Instruments data acquisition system. Magnetic field waveforms were recorded so that DC and full frequency information is available over the entire sensor bandwidth.

#### **Overview of the Measurement Results**

## Magnetic Fields

The measured DC magnetic field strengths ranged from 388 milligauss (mG) to 488 mG across the 10 measurement sites. At individual sites, the difference in DC field strength between the two sensors ranged from 15 to 46 mG. These differentials typically are the result of the influence from passing vehicles or nearby steel objects.

AC magnetic field strengths at the 10 sites varied over a range of more than three orders of magnitude, from 0.009 mG to 47 mG. The levels depend almost entirely on a site's proximity to power lines (medium-voltage distribution and high-voltage transmission lines) and other electrical system infrastructure. Such a wide range in observed magnetic field strengths is expected, given the variable levels of development along the project extent.

Figure 1 provides an illustration of the measured AC magnetic field strengths for three representative measurement sites: rural (Los Banos, Site 10), suburban (Gilroy, Site 8), and in close proximity to high-voltage transmission lines (Coyote, Site 5). These sites encompass the full range of observed 60 hertz (Hz) magnetic field levels, with Site 10 the lowest, Site 5 the highest, and Site 6 representing the median level. Levels are plotted for the 60 Hz fundamental.



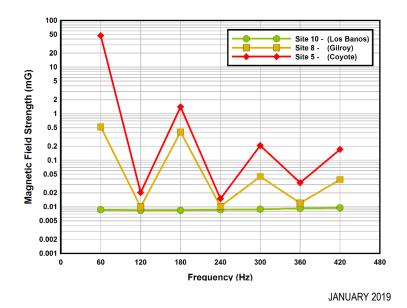


Figure 1 Average Measured AC Magnetic Field Strengths

#### **Electric Fields**

Because of the very broad range of frequencies of interest, the electric field measurements at each site were divided into eight overlapping frequency bands to provide adequate frequency resolution in each band. Table 1 summarizes the maximum magnitude of the measured electric field values by frequency band for each site. The maximum electric fields strengths in bands B0 through B4 varied considerably across sites. Except for band B2 (the AM broadcast band), levels spanned a 30 decibel (dB) range. Even greater variation was seen at higher frequencies (bands B5 through B7), reflecting stronger differences in spectrum usage along the project alignment. Measured maximum levels in these bands varied by up to 45 dB. Variations of this magnitude are not unexpected when encompassing the range of urban, suburban, and rural settings found in the project extent.

Table 1 Maximum Measured Electric Field Strengths by Frequency Band

Measurement Site San Jose Diridon Station A	B0 10-50 kHz	B1 50-550 KHz	B2 .50-3.0 MHz	B3 2.5-7.5 MHz	B4 5.0-30 MHz	B5 25- 200 MHz	B6 0.20- 2.2 GHz	B7 2.0- 6.0 GHz
	· ·		440.5	400.4	404.7	440.0	400.0	444.4
1 – San Jose (urban)	135.1	128.4	143.5	128.4	101.7	119.0	122.9	114.4
2 – San Jose (urban)	146.7	124.4	145.0	122.5	97.1	110.6	118.7	112.3
Monterey Corridor Subsect	ion							
3 – San Jose (urban)	138.5	129.8	145.3	130.0	108.2	93.7	102.4	102.2
4 – San Jose (urban)	128.6	115.1	135.2	109.6	100.8	123.5	110.7	96.3
Morgan Hill and Gilroy Sub	section							
5 – Coyote (rural)	154.8	143.7	144.0	118.6	102.8	117.6	107.4	74.3
6 – Morgan Hill (rural)	134.7	113.5	135.1	96.9	83.7	96.8	119.0	105.5
7 – Gilroy (suburban)	133.5	127.1	142.5	123.6	88.8	102.9	102.4	103.5



Measurement Site	B0 10-50 kHz	B1 50-550 KHz	B2 .50-3.0 MHz	B3 2.5-7.5 MHz	B4 5.0-30 MHz	B5 25- 200 MHz	B6 0.20- 2.2 GHz	B7 2.0- 6.0 GHz
Pacheco Pass Subsection								
8 – Hollister (rural)	128.1	119.8	136.1	109.8	84.9	82.7	90.6	68.9
San Joaquin Valley Subsec	tion							
9 - Santa Nella (rural)	141.1	122.9	139.1	117.0	86.9	80.0	102.3	92.5
10 –Los Banos (rural)	148.4	131.3	134.7	112.3	107.4	83.9	80.4	69.8

Field strength values are in decibel (dB), referenced to 1 microvolt meter/MHz.

GHz = gigahertz

KHz = kilohertz

MHz = megahertz

Figure 2 graphically shows the maximum measured electric field strengths by frequency band for the 10 measurement sites. Typical spectrum uses in each frequency band are also indicated in Figure A3.5-2. Increasing distance from the plot origin indicates higher field strength. Figure 3 shows the variance in RF field strengths across the measurement sites by frequency band. Standard deviations ranged from 4.5 dB in band B2 to as great as 17 dB in band B7.

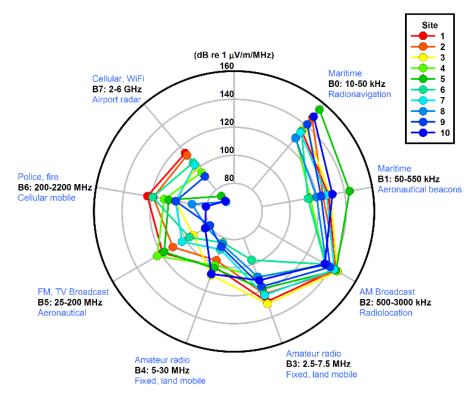


Figure 2 Maximum Electric Field Strengths by Frequency Band



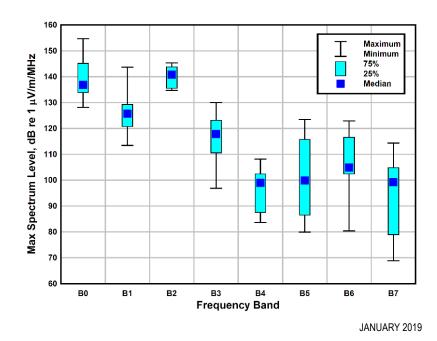


Figure 3 Variation in Measured Maximum Electric Field Strengths

The 10 panels in Figure A3.5-4 graphically show the tabulated electric field strength values from Table A3.5-1.



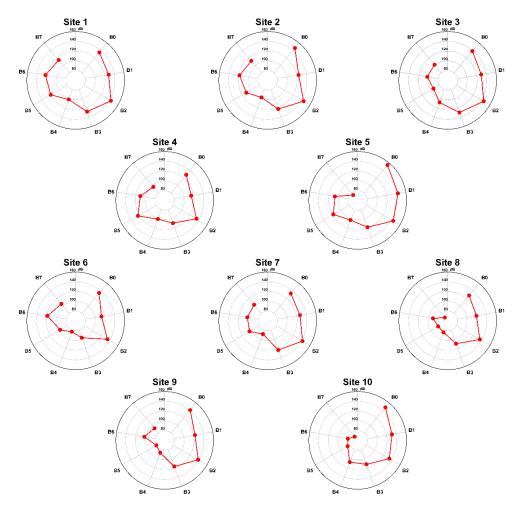


Figure 4 Maximum Measured Electric Field Strengths

#### **Individual Site Observations**

The following discussion very briefly summarizes the EMF measurements conducted at each site. Complete measurement results are plotted and tabulated in the following section.

#### Site 1 (Newhall Street / Newhall Drive)

This measurement site was near Avaya Stadium. DC magnetic fields were quiet at this location. AC magnetic fields were due to overhead distribution lines. Magnetic fields show some variation due to varying load currents on the power lines, including a step change near the middle.

#### Site 2 (Montgomery Street / Otterson Street)

This location was South of Diridon Station adjacent to the Pacific Gas and Electric Company (PG&E) Distribution Substation. DC magnetic fields were relatively constant with very small variations. The first sensor had a total magnitude comparable to expected ambient, but the second was lower, indicating influence from nearby steel objects. Multiple trains moved along the alignment, but on the opposite side of the substation, they were sufficiently distant for the DC fluctuations to be quite small. AC magnetic fields in the 10-20 mG range are produced by the substation bus conductors and the power lines connected to the substation.



#### Site 3 (Communications Hill Boulevard / Curtner Avenue)

Measurements were made near Communications Hill, in a park adjacent to the project extent alignment. Both DC and AC magnetic fields were relatively quiet. DC magnetic fields were comparable in magnitude to the expected geomagnetic ambient level, with a few small variations due to pedestrians in the park passing very near the sensors (e.g., cell phones, strollers). There were no nearby power lines or underground circuits.

#### Site 4 (Great Oaks Parkway / Las Colinas Road)

This measurement site is immediately adjacent to tracks along Great Oak Parkway. DC magnetic field magnitudes were at expected ambient levels, with many small variations due to passing vehicles on Great Oak Parkway. AC magnetic fields were from overhead distribution lines on the opposite site of the tracks.

### Site 5 (Metcalf Road / Coyote Ranch Road)

Measurements were made in front of PG&E Station. Spikes in DC magnetic fields were from passing vehicles along the adjacent road. AC fields were predominantly from the overhead transmission lines—four circuits on two sets of steel lattice towers—with magnitudes of nearly 50 mG at both sensors.

#### Site 6 (Railroad Avenue / Barrett Avenue)

This measurement site is in Morgan Hill, along Railroad Avenue, across from tracks. The DC magnetic fields were relatively constant with a few spikes due to passing vehicles. AC magnetic fields were less than 1 mG, with overhead distribution lines on the opposite side of the street along the tracks.

#### Site 7 (Monterey Highway / Las Animas Avenue)

This measurement site is in Gilroy on a cul-de-sac off Las Animas Avenue. This is a quiet area with constant DC magnetic fields and very low AC fields. Adjacent fields are used for livestock grazing. An overhead distribution line runs along the tracks.

#### Site 8 (State Route 152 / Casa de Fruta Parkway)

This measurement site is on Casa de Fruta Parkway, adjacent to State Route (SR) 152. This is a quiet area with virtually no DC magnetic field variations and essentially zero AC magnetic fields. There were no nearby AC power lines or sources.

#### Site 9 (Santa Nella Avenue / Fahey Road)

This measurement site is an agricultural area along Santa Nella Road. There were small DC field variations due to vehicles on SR 33. AC fields were in the 1-2 mG range due to distribution lines. AC fields showed variation over time.

#### Site 10 (Henry Miller Road / Carlucci Road)

Measurements were taken in an agricultural area northeast of Los Banos along Henry Miller Road. DC magnetic field spikes were due to passing trucks. AC fields were quite low. There was a distribution line to the south side of the sensor positions. A shift of the AC fields occurred for several minutes followed by a quick transient, most likely due to a load change on the distribution line such as running of pumps for irrigation.

#### Site Photographs and Measurement Data

The remainder of this appendix contains photographs and measurement results from each site.



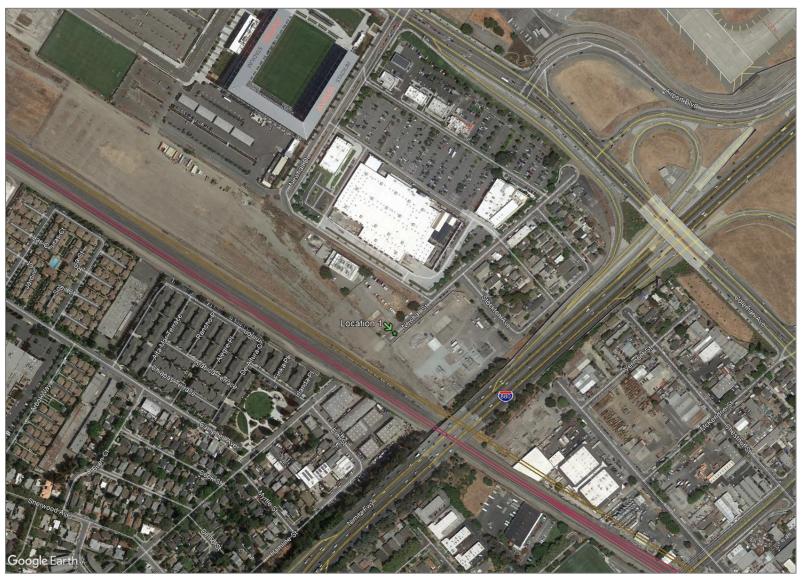


Figure 5(a) Location 1: Newhall Street / Newhall Drive, San Jose

Industrial/commercial area near the existing rail alignment, Avaya Stadium, and San Jose International airport (Lat 37.347447°, -121.923012°)

California High-Speed Rail Authority

February 2022





Figure 5(b) Location 1: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.
















Figure 5(c) Location 1: Local EMF Sources

Nearby emitters include cell towers, distribution lines parallel and perpendicular to the alignment, and a small electrical substation. Photos depict visible close-proximity emitters. Other emissions sources may exist, but are not visible from the site.





	DC Magnetic Field Measurement Statistics													
	B Horizontal (mG) B Vertical (mG) B Total (mG)													
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2								
Max	242.1	249.6	378.0	361.2	448.7	439.0								
Median	241.8	249.4	377.9	361.0	448.6	438.8								
Min	241.7	249.2	377.6	360.0	448.5	437.9								
Range	0.4	0.5	0.4	1.3	0.2	1.1								
Std Dev	0.1	0.1	0.0	0.2	0.0	0.2								

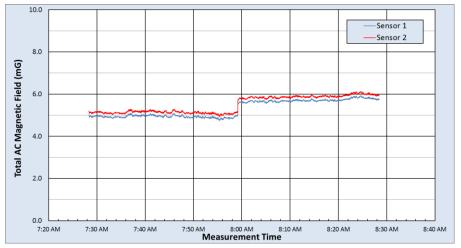

	rms AC Magnetic Field Measurement Statistics															
	Fund 60Hz (mG) 2nd (mG		(mG)	3rd (mG) 4th (r		(mG) 5th (mG)		6th (	mG)	7th	(mG)	Total A	C (mG)			
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	5.910	6.109	0.023	0.034	0.110	0.116	0.019	0.058	0.494	0.543	0.021	0.027	0.098	0.099	5.925	6.127
Median	5.018	5.214	0.011	0.013	0.090	0.094	0.009	0.011	0.439	0.481	0.009	0.011	0.028	0.032	5.041	5.241
Min	4.709	4.891	0.002	0.003	0.068	0.071	0.002	0.003	0.364	0.388	0.002	0.002	0.008	0.008	4.733	4.920
Range	1.201	1.218	0.021	0.030	0.042	0.045	0.018	0.056	0.130	0.155	0.019	0.025	0.090	0.092	1.192	1.207
Std Dev	0.396	0.394	0.003	0.004	0.008	0.006	0.003	0.006	0.023	0.028	0.003	0.003	0.022	0.022	0.393	0.390

Figure 5(d) Location 1: AC and DC Magnetic Field Measurement Results



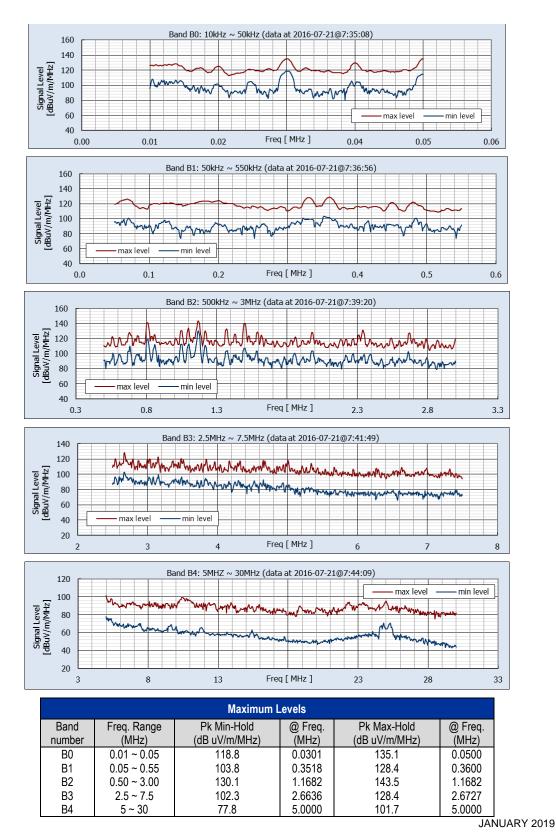



Figure 5(e) Location 1: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4

California High-Speed Rail Authority

February 2022



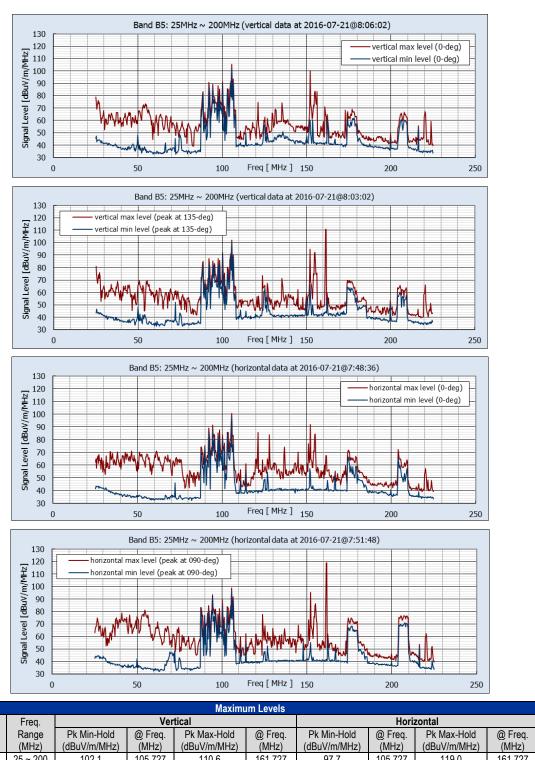


Band number B5 25 ~ 200 102.1 105.727 161.727 105.727 119.0 161.727

Figure 5(f) Location 1: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



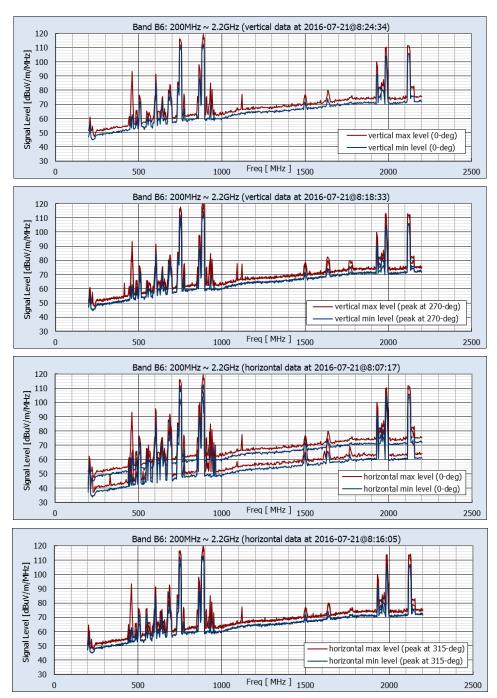

	Maximum Levels												
Freq. Vertical Horizontal													
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.				
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
B6	200 ~ 2200	114.6	887.273	122.9	890.909	113.0	887.273	119.3	890.909				
								JANU	ARY 2019				

Figure 5(g) Location 1: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



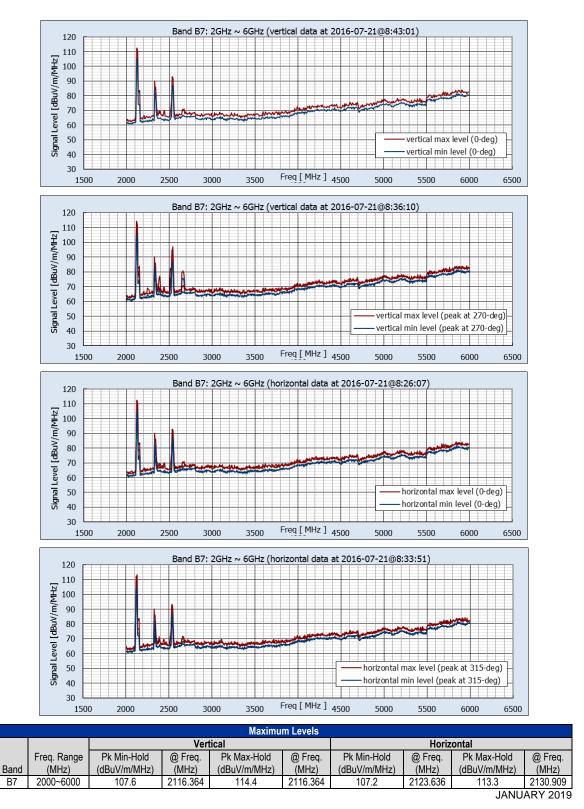


Figure 5(h) Location 1: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



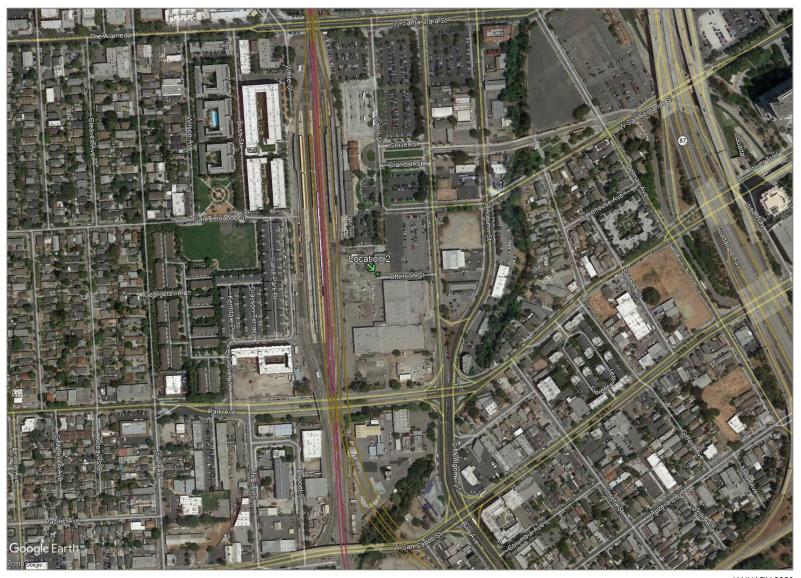


Figure 6(a) Location 2: Montgomery Street / Otterson Street, San Jose

Industrial/commercial setting between San Jose Diridon Station and the PG&E substation (Lat 37.328142°, Lon -121.902140°)

California High-Speed Rail Authority

February 2022





Figure 6(b) Location 2: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.

February 2022

California High-Speed Rail Authority












Figure 6(c) Location 2: Local EMF Sources

Nearby emitters include high-voltage transmission lines and substation equipment, distribution lines, and cellular communications. Photos depict visible close-proximity emitters. Other emissions sources may exist, but are not visible from the site.


California High-Speed Rail Authority

February 2022



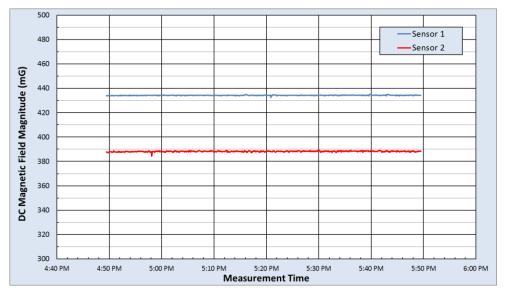

	DC Magnetic Field Measurement Statistics													
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Total (mG)									
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2								
Max	289.7	222.9	325.5	319.5	434.9	389.1								
Median	288.9	222.2	324.1	318.4	434.2	388.2								
Min	288.2	221.0	322.3	314.1	432.5	384.4								
Range	1.5	1.9	3.2	5.5	2.4	4.7								
Std Dev	0.2	0.4	0.3	0.5	0.2	0.4								

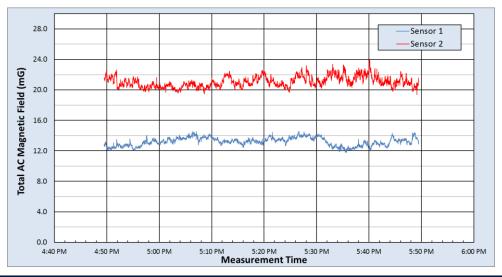

					r	ms AC Ma	ignetic Fi	eld Meası	ırement S	tatistics						
	Fund 60Hz (mG)		2nd (mG)		3rd (mG)		4th (	mG)	5th (	mG)	6th (	mG)	7th (	mG)	Total A	C (mG)
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	14.402	23.718	0.107	0.229	2.078	4.397	0.073	0.092	0.699	0.727	0.076	0.244	0.314	0.488	14.556	24.043
Median	13.072	20.533	0.037	0.083	2.004	4.079	0.015	0.033	0.629	0.550	0.018	0.090	0.275	0.380	13.241	20.946
Min	11.594	18.948	0.007	0.010	1.937	3.729	0.003	0.006	0.576	0.381	0.005	0.019	0.231	0.303	11.791	19.387
Range	2.808	4.770	0.100	0.219	0.141	0.668	0.070	0.087	0.122	0.347	0.071	0.225	0.082	0.185	2.765	4.656
Std Dev	0.552	0.719	0.013	0.038	0.023	0.086	0.006	0.014	0.017	0.058	0.006	0.030	0.010	0.024	0.543	0.706

Figure 6(d) Location 2: AC and DC Magnetic Field Measurement Results



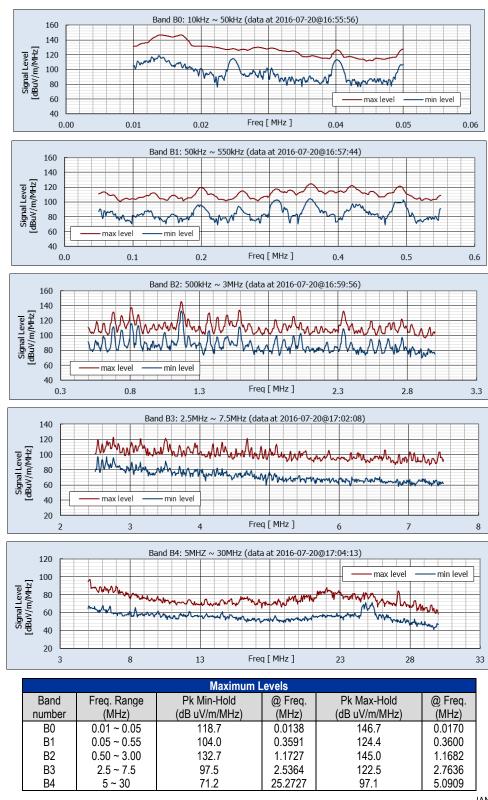


Figure 6(e) Location 2: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4

California High-Speed Rail Authority

February 2022




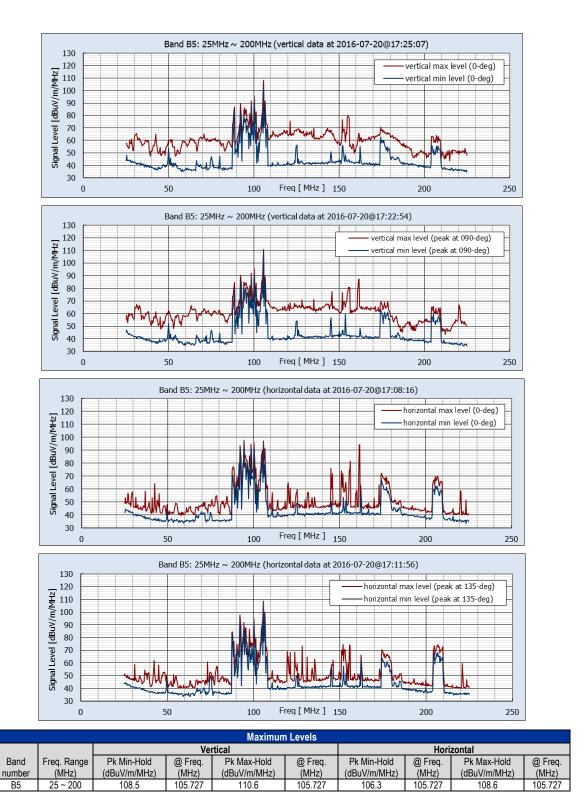


Figure 6(f) Location 2: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



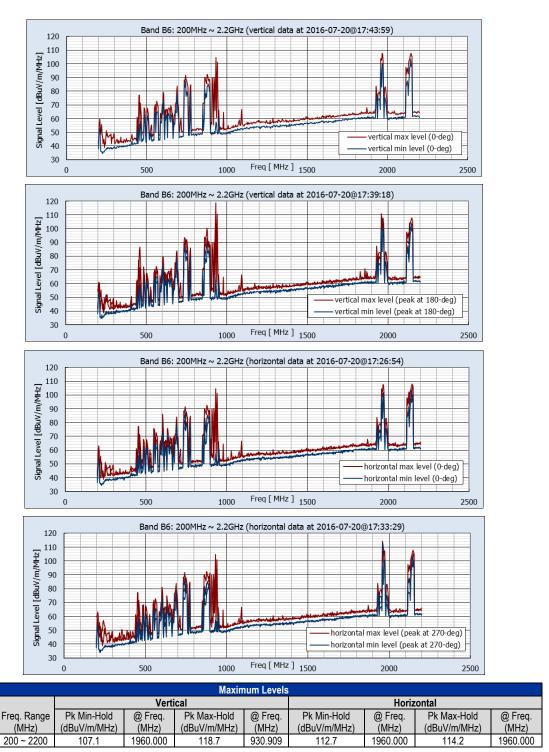


JANUARY 2019

Figure 6(g) Location 2: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

Band



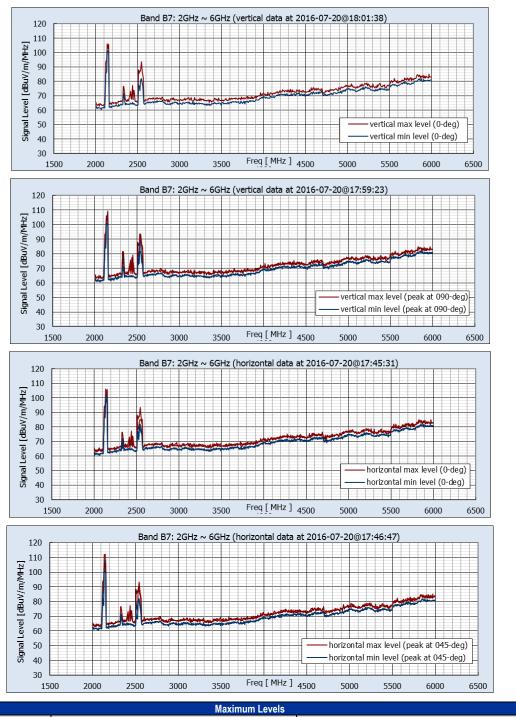

	Maximum Levels												
Freq. Vertical Horizontal													
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.				
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
B7	2000~6000	107 4	2152 727	109.2	2152.727	108.3	2145 455	112 3	2145 455				

Figure 6(h) Location 2: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 7(a) Location 3: Communications Hill Boulevard/Monte Vista Drive, San Jose

Suburban setting near the existing rail alignment, with significant RF emitters (Lat 37.293722°, Lon -121.865194°)



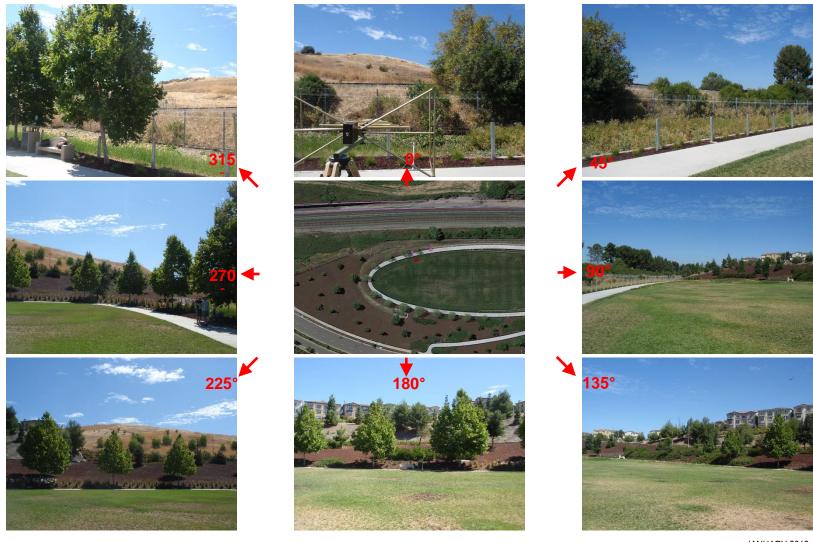


Figure 7(b) Location 3: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.










Figure 7(c) Location 3: Local EMF Sources

Nearby emitters include microwave towers, railway communications, and fixed land communications.


Photos depict visible close-proximity emitters. Other emissions sources may exist that are not readily visible from the site.

California High-Speed Rail Authority



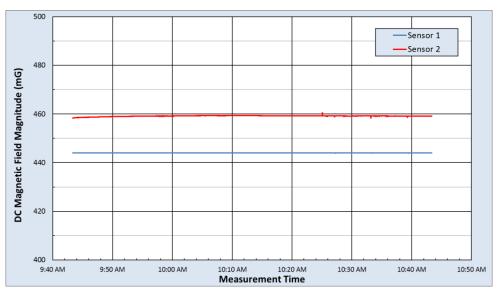

	DC Magnetic Field Measurement Statistics													
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Total (mG)									
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2								
Max	248.0	202.6	368.6	413.8	444.1	460.6								
Median	247.7	201.2	368.5	412.9	444.0	459.2								
Min	247.4	198.7	368.3	411.7	443.8	458.3								
Range	0.5	3.9	0.3	0.3 2.2 0.2										
Std Dev	0.1	8.0	0.1	0.3	0.0	0.2								

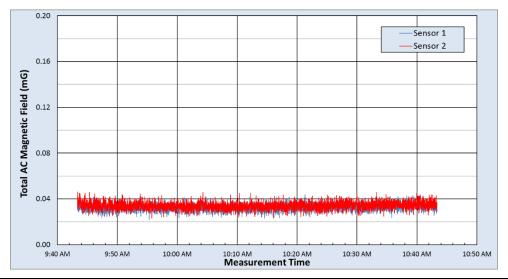

	rms AC Magnetic Field Measurement Statistics															
	Fund 60Hz (mG)		2nd (mG)		3rd (mG)		4th (mG)		5th (mG)		6th (mG)		7th (mG)		Total AC (mG)	
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	0.028	0.030	0.019	0.020	0.031	0.032	0.020	0.028	0.022	0.026	0.020	0.022	0.021	0.024	0.044	0.046
Median	0.016	0.016	0.008	0.008	0.020	0.020	0.008	0.009	0.009	0.010	0.009	0.009	0.009	0.010	0.033	0.034
Min	0.004	0.004	0.002	0.002	0.008	0.007	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.003	0.022	0.023
Range	0.024	0.027	0.018	0.018	0.023	0.024	0.018	0.026	0.020	0.024	0.018	0.021	0.020	0.021	0.022	0.023
Std Dev	0.003	0.004	0.002	0.003	0.003	0.004	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003

Figure 7(d) Location 3: Measured DC and AC Magnetic Field Strengths




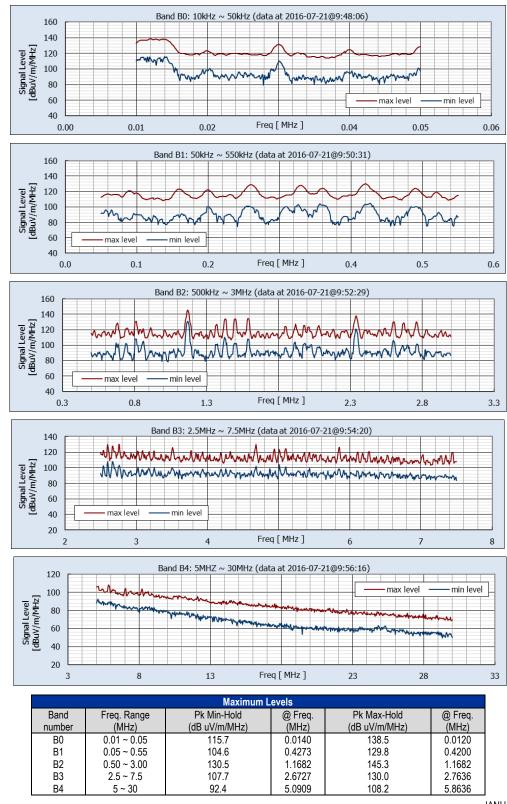


Figure 7(e) Location 3: Measured Environmental RF Levels Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4




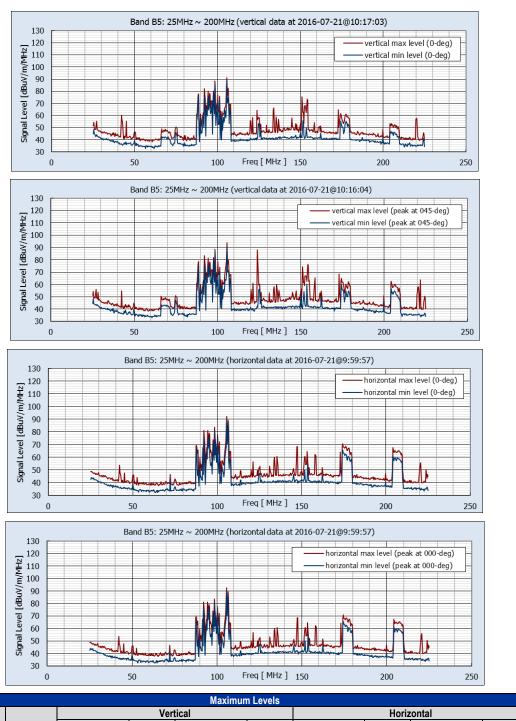

Freq. @ @ @ @ Band Range Pk Min-Hold Freq. Pk Max-Hold Freq. Pk Min-Hold Freq. Pk Max-Hold Freq. (MHz) (dBuV/m/MHz) (MHz (dBuV/m/MHz (MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) number B5 25 ~ 200 89.6 105.727 93.7 105.727 90.5 105.727 92.4 105.727

Figure 7(f) Location 3: Measured Environmental RF Levels Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation




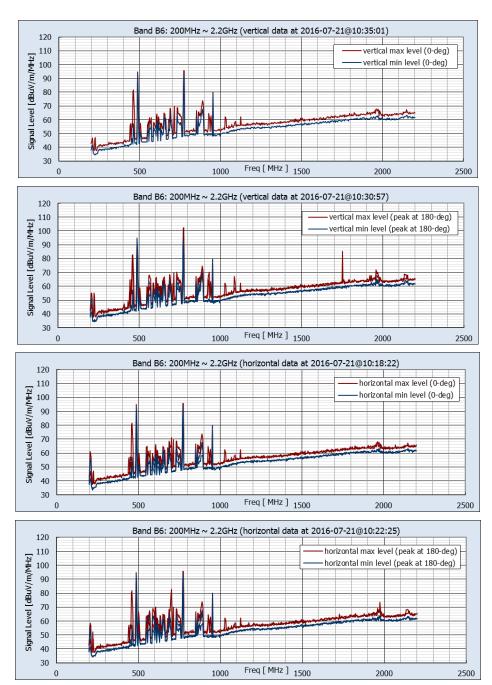

Maximum Levels											
			Ver	tical		Horizontal					
	Freq.		@		@		@				
	Range	Pk Min-Hold	Freq.	Pk Max-Hold	Freq.	Pk Min-Hold	Freq.	Pk Max-Hold	@ Freq.		
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)		
B6	200 ~ 2200	97.4	770.909	102.4	774.545	79.8	774.545	87.2	774.545		

Figure 7(g) Location 3: Measured Environmental RF Levels Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



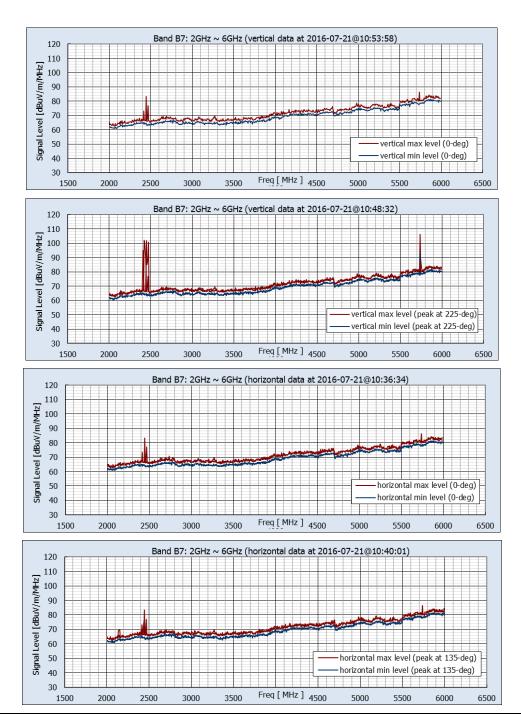

Maximum Levels											
			Ver	tical		Horizontal					
	Freq. Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.		
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)		
B7	2000~6000	66.3	2712.727	102.2	2421.818	66.8	2690.909	75.1	2436.364		

Figure 7(h) Location 3: Measured Environmental RF Levels Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 8(a) Location 4: Great Oaks Parkway/Las Colinas Road, San Jose

Adjacent to high technology office park and near the existing rail; no visible RF emitters (Lat 37.239322°, Lon -121.776080°)

California High-Speed Rail Authority

February 2022



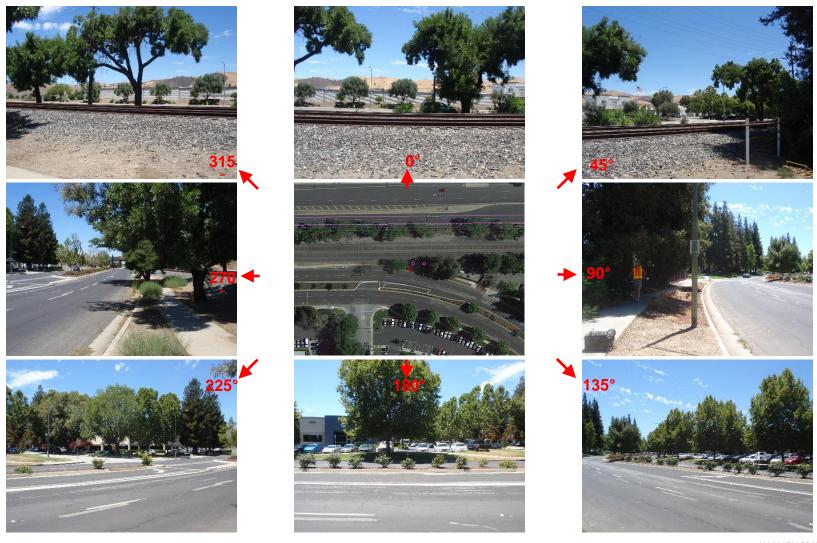


Figure 8(b) Location 4: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.





Figure 8(c) Location 4: Local EMF Sources


Nearby emitters included a single local distribution line.

Photos depict visible close-proximity emitters. Other emissions sources may exist, but are not visible from the site.


California High-Speed Rail Authority

February 2022



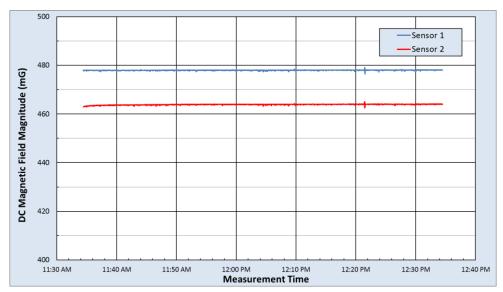

	D	C Magnetic Fi	eld Measuren	nent Statistics		
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Tota	ıl (mG)
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2
Max	245.1	254.0	412.4	389.9	479.1	465.0
Median	242.4	251.9	411.9	389.6	478.0	463.9
Min	240.0	249.6	411.1	388.4	476.4	462.6
Range	5.1	4.4	1.3	1.5	2.7	2.4
Std Dev	0.2	0.1	0.1	0.2	0.1	0.2

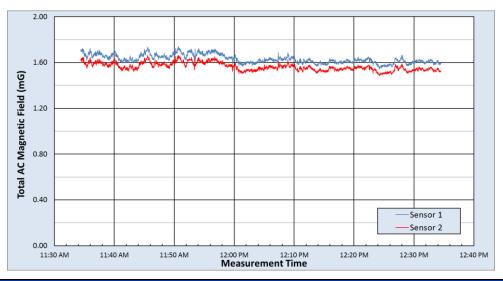

	rms AC Magnetic Field Measurement Statistics															
	Fund 60	Hz (mG)	2nd	(mG)	3rd (	(mG)	4th (	mG)	5th (	mG)	6th (	mG)	7th (	mG)	Total A	C (mG)
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	0.990	0.916	0.023	0.024	1.488	1.443	0.025	0.027	0.162	0.155	0.030	0.029	0.075	0.072	1.740	1.664
Median	0.722	0.657	0.011	0.011	1.446	1.402	0.012	0.012	0.135	0.127	0.015	0.015	0.059	0.057	1.624	1.558
Min	0.557	0.507	0.002	0.002	1.381	1.340	0.003	0.002	0.107	0.094	0.004	0.004	0.044	0.043	1.541	1.485
Range	0.433	0.409	0.021	0.021	0.107	0.104	0.022	0.025	0.056	0.061	0.026	0.025	0.032	0.029	0.199	0.179
Std Dev	d Dev 0.097 0.093 0.003 0.003 0.002 0.020 0.020 0.004 0.004 0.009 0.009 0.004 0.004 0.004 0.004 0.004 0.0037 0.034															

Figure 8(d) Location 4: AC and DC Magnetic Field Measurement Results



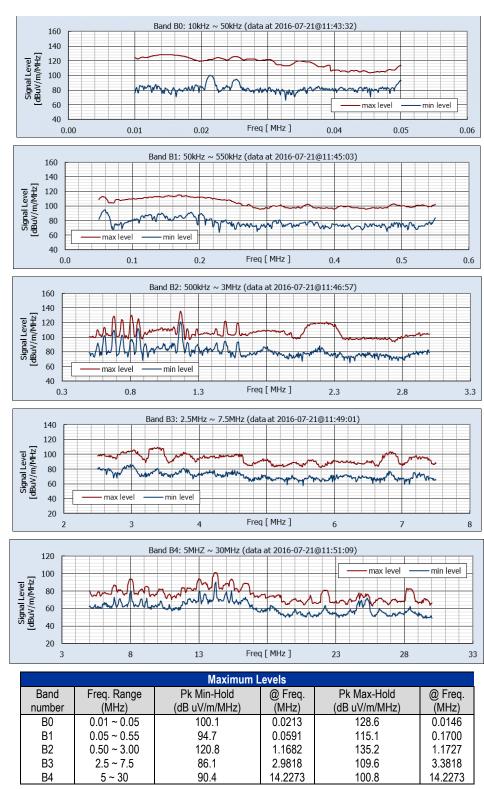


Figure 8(e) Location 4: Measured Environmental RF Levels Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4




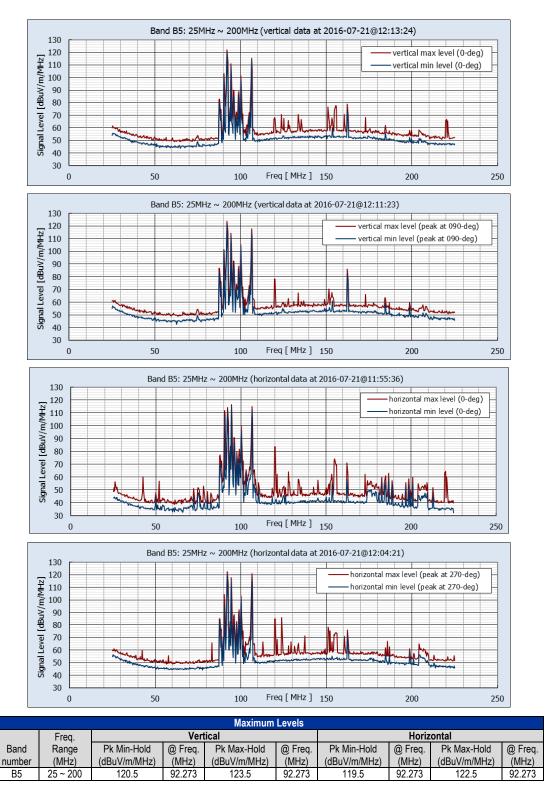


Figure 8(f) Location 4: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



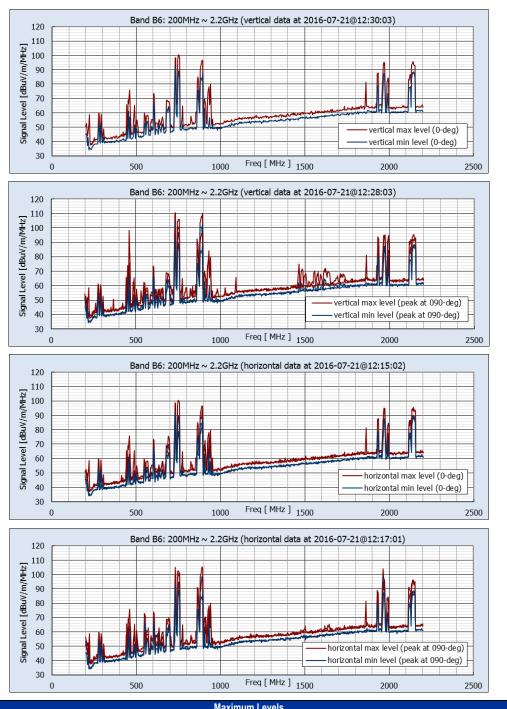

				Maximur	n Levels								
	Freq. Vertical Horizontal												
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.				
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
B6	200 ~ 2200	103 7	730 909	110 7	734 545	98.5	887 273	105.4	890 909				

Figure 8(g) Location 4: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



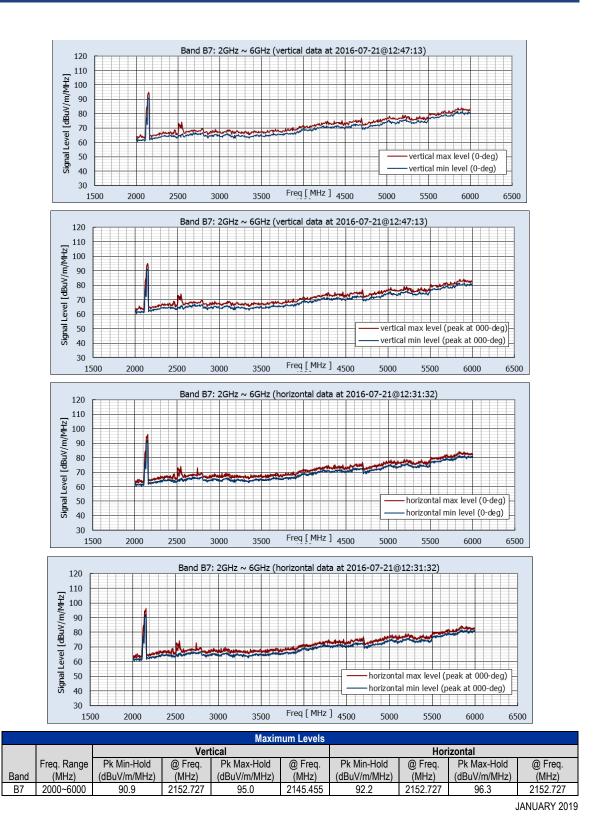


Figure 8(h) Location 4: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 9(a) Location 5: Metcalf Energy Center, San Jose

Adjacent to the PG&E Metcalf Substation (Lat 37.223022°, Lon -121.744592°)





Figure 9(b) Location 5: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.

February 2022

California High-Speed Rail Authority







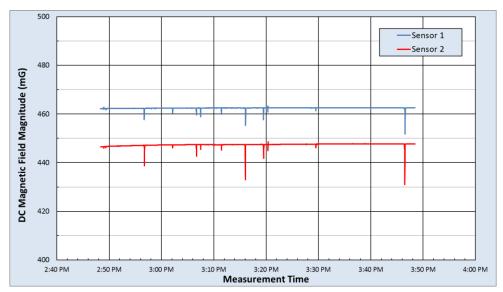





Figure 9(c) Location 5: Local EMF Sources

Immediately adjacent to the PG&E Substation. Nearby emitters include high-voltage transmission lines and substation equipment Photos depict visible close-proximity emitters. Other emissions sources are assumed to exist, but are not visible from the site.





	D	C Magnetic Fi	eld Measuren	nent Statistics							
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Tota	ıl (mG)					
	Sensor 1										
Max	244.0	241.9	398.1	381.9	463.3	448.6					
Median	235.8	234.1	397.8	381.4	462.5	447.4					
Min	232.0	228.3	382.4	358.9	451.8	431.1					
Range	12.0	13.5	15.7	23.0	11.5	17.6					
Std Dev	0.3	0.4	0.4	0.7	0.3	0.6					

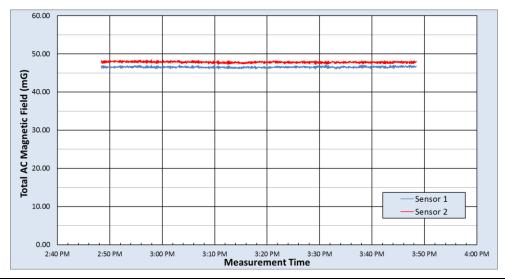

	rms AC Magnetic Field Measurement Statistics															
	Fund 60	Hz (mG)	2nd	(mG)	3rd (	(mG)	4th (	mG)	5th (	mG)	6th (	mG)	7th (	(mG)	Total A	C (mG)
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	47.175	48.472	0.075	0.105	1.282	1.630	0.074	0.070	0.248	0.255	0.087	0.089	0.232	0.223	47.192	48.499
Median	46.512	47.805	0.017	0.023	1.226	1.578	0.016	0.014	0.200	0.215	0.034	0.032	0.175	0.167	46.529	47.832
Min	46.002	47.107	0.003	0.005	1.186	1.543	0.003	0.003	0.163	0.184	0.014	0.010	0.150	0.140	46.019	47.135
Range	1.173	1.364	0.072	0.100	0.096	0.086	0.071	0.067	0.085	0.072	0.072	0.079	0.082	0.083	1.173	1.364
Std Dev	d Dev 0.174 0.189 0.007 0.009 0.018 0.015 0.005 0.005 0.006 0.007 0.007 0.007 0.007 0.007 0.007 0.174 0.189															

Figure 9(d) Location 5: AC and DC Magnetic Field Measurement Results



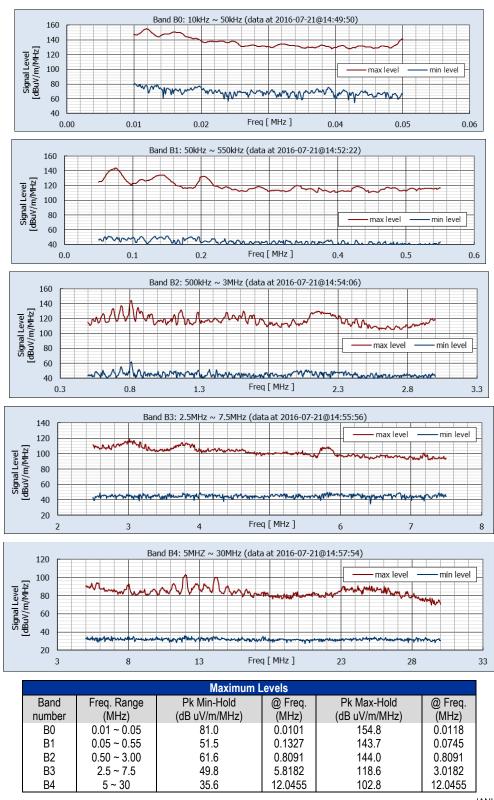


Figure 9(e) Location 5: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4

California High-Speed Rail Authority

February 2022



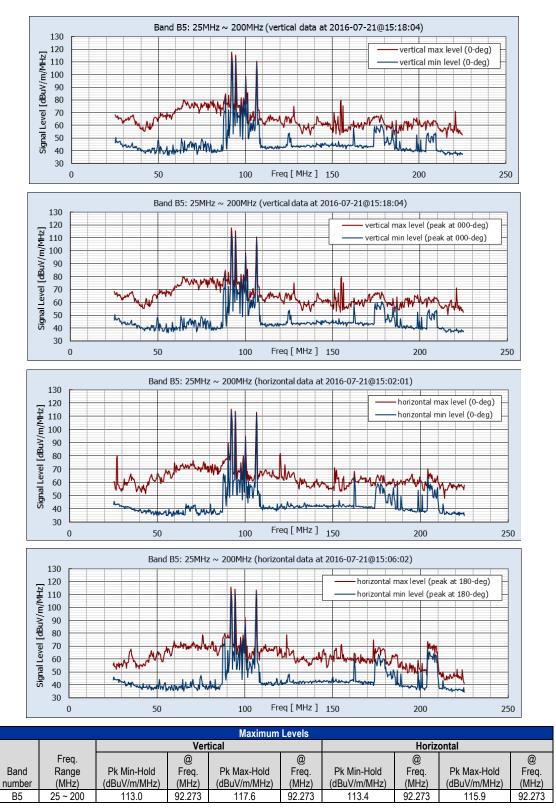



Figure 9(f) Location 5: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

February 2022

California High-Speed Rail Authority



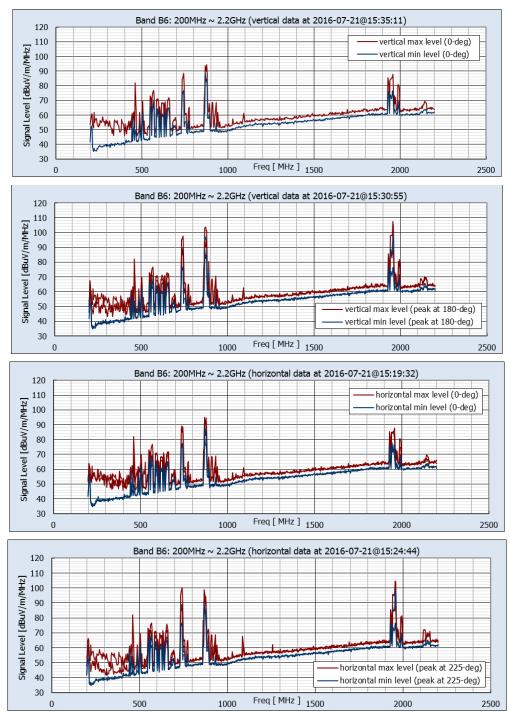


				Maxim	um Levels								
	Vertical Horizontal												
	Freq.												
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.				
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
В6	200 ~ 2200	98.4	1956.364	107.4	1956.364	98.8	1956.364	104.5	1956.364				

## Figure 9(g) Location 5: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



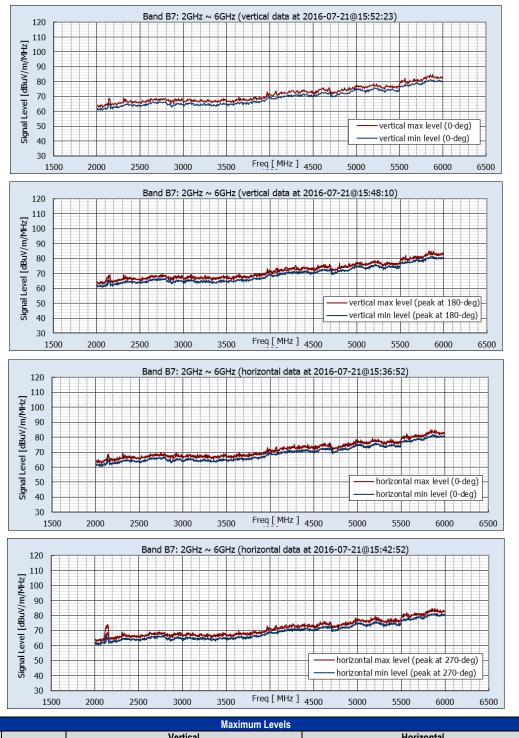

					Maximu	ım Levels							
I	Vertical Horizontal												
		Freq. Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.			
	Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)			
ſ	R7	2000~6000	66.4	2720 000	69.2	2312 727	68.8	2145 455	74.3	2145 455			

Figure 9(h) Location 5: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 10(a) Location 6: Railroad Avenue/Barrett Avenue, Morgan Hill

Commercial area across from Morgan Hill Police Department, (Lat 37.118225°, Lon -121.638550°)






Figure 10(b) Location 6: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.







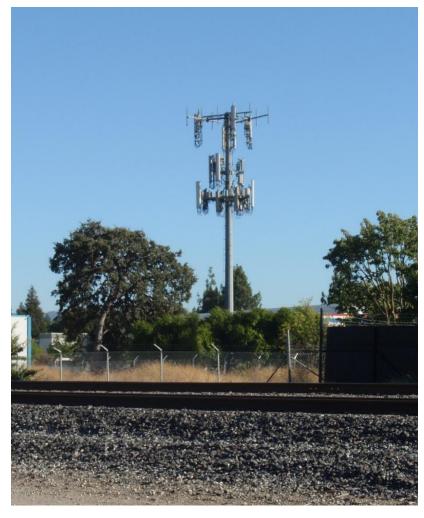


JANUARY 2019 JANUARY 2020

Figure 10(c) Location 6: Local EMF Sources


Nearby emitters include cell towers, fixed land communications, and distribution lines parallel to the alignment.

Photos depict visible close-proximity emitters. Other emissions sources may exist that are not readily visible from the site.



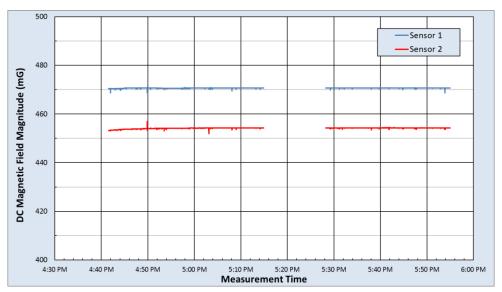

	D	C Magnetic Fi	eld Measuren	nent Statistics		
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Tota	ıl (mG)
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2
Max	221.7	239.2	416.6	393.8	470.9	456.9
Median	219.5	227.1	416.3	393.3	470.6	454.2
Min	216.6	226.0	413.9	389.3	468.8	451.8
Range	5.1	13.2	2.7	4.5	2.1	5.1
Std Dev	0.2	0.3	0.1	0.2	0.1	0.2

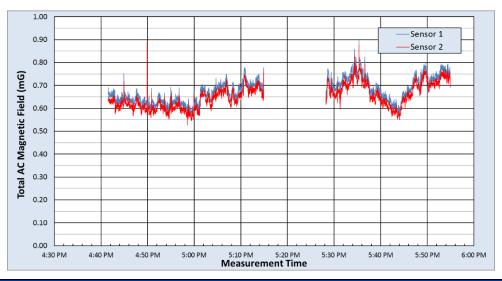


	rms AC Magnetic Field Measurement Statistics															
	Fund 60	Hz (mG)	2nd	(mG)	3rd (	mG)	4th (	(mG)	5th (	mG)	6th (	mG)	7th (	mG)	Total A	C (mG)
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	0.808	0.786	0.065	0.206	0.469	0.476	0.068	0.105	0.107	0.102	0.075	0.072	0.094	0.092	0.902	0.891
Median	0.528	0.516	0.010	0.010	0.417	0.389	0.010	0.010	0.046	0.044	0.012	0.012	0.041	0.036	0.673	0.647
Min	0.359	0.354	0.003	0.002	0.375	0.345	0.001	0.002	0.028	0.023	0.003	0.002	0.025	0.019	0.554	0.526
Range	0.449	0.432	0.062	0.204	0.094	0.131	0.066	0.104	0.079	0.078	0.073	0.070	0.069	0.073	0.348	0.365
Std Dev	0.067	0.065	0.006	0.006	0.012	0.013	0.007	0.007	0.008	0.008	0.010	0.009	0.009	0.009	0.053	0.052

JANUARY 2019 JANUARY 2020

Figure 10(d) Location 6: AC and DC Magnetic Field Measurement Results



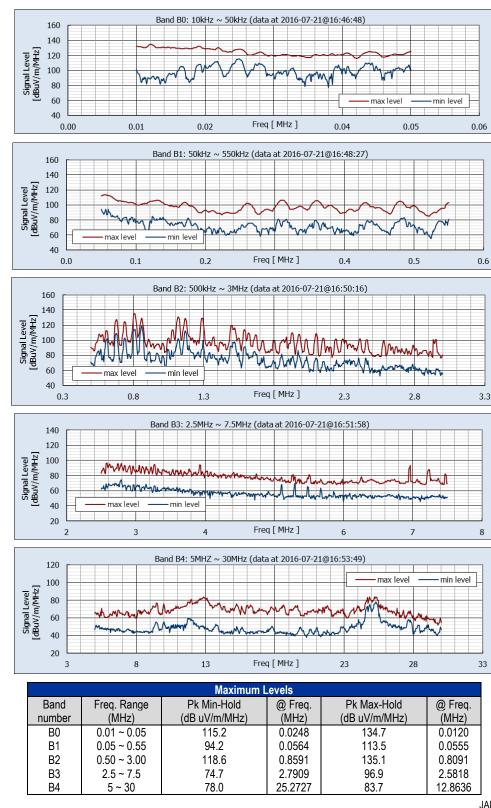



## **JANUARY 2020**

Figure 10(e) Location 6: Measured Environmental RF Levels



## Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4

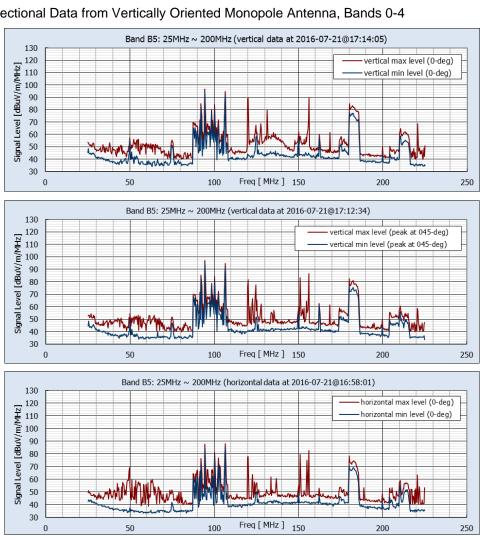

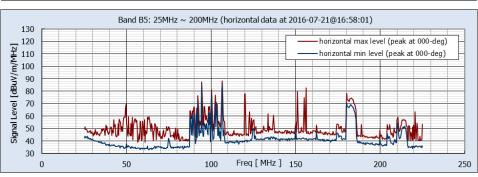


				Maximun	n Levels								
	Vertical Horizontal												
	Freq.		@		@		@		@				
Band	Range	Pk Min-Hold	Freq.	Pk Max-Hold	Freq.	Pk Min-Hold	Freq.	Pk Max-Hold	Freq.				
number	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
B5	25 ~ 200	95.1	94.455	96.8	94.455	85.4	106.455	88.1	106.455				

JANUARY 2019 JANUARY 2020

Figure 10(f) Location 6: Measured Environmental RF Levels



Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

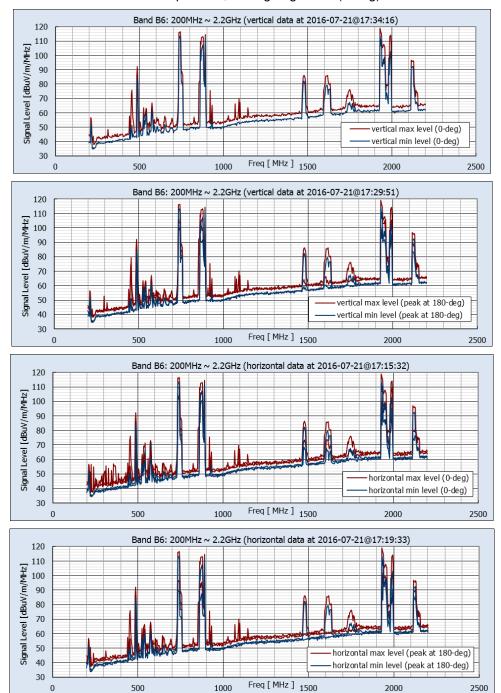

				Maximu	um Levels				
			Vert	tical			Horiz	ontal	
	Freq. Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)
B6	200 ~ 2200	114 6	1930 909	119.0	1930 909	106.8	890 909	110 1	741 818

1000

JANUARY 2019 JANUARY 2020

2500

Figure 10(g) Location 6: Measured Environmental RF Levels


2000

0


500




Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

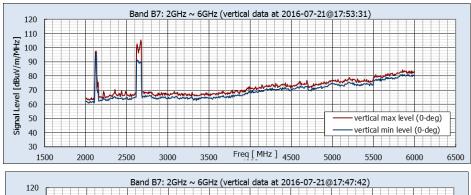



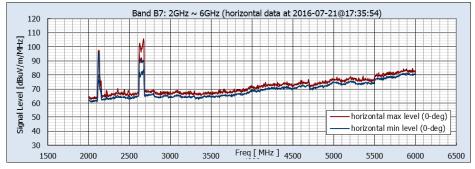

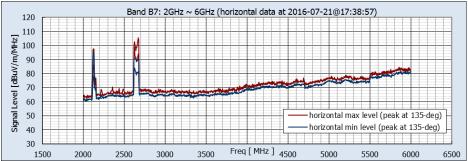

				Maximu	ım Levels							
	Freq. Vertical Horizontal											
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.			
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)			
B7	2000~6000	95.3	2123.636	105.5	2669.091	84.1	2625.455	98.7	2625.455			

JANUARY 2019 JANUARY 2020

Figure 10(h) Location 6: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 11(a) Location 7: Monterey Highway/Las Animas Avenue, Gilroy

Suburban setting, with relatively few local RF emitters (Lat 37.028851°, Lon -121.578510°)

California High-Speed Rail Authority

February 2022





Figure 11(b) Location 7: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.







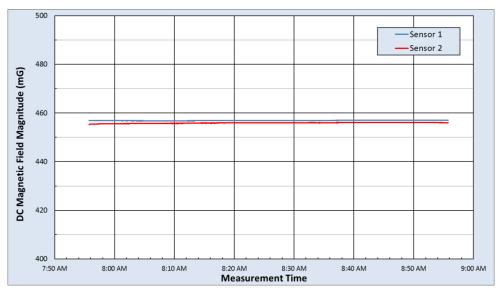


Figure 11(c) Location 7: Local EMF Sources


Nearby emitters include microwave towers, railway communications, and distribution lines parallel to the alignment.

Photos depict visible close-proximity emitters. Other emissions sources may exist that are not readily visible from the site.





DC Magnetic Field Measurement Statistics											
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Total (mG)						
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2					
Max	230.3 226.2		395.5 396.6		457.0	456.1					
Median	230.0	230.0 225.3		394.8 396.3		456.0					
Min	228.8 224.0		394.5	396.0	456.8	455.3					
Range	1.6 2.2		1.0	0.6	0.2	0.8					
Std Dev	0.2 0.5		0.1	0.2	0.1	0.2					

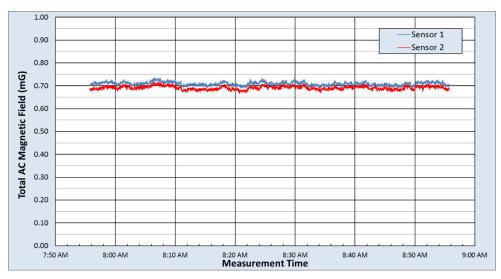

	rms AC Magnetic Field Measurement Statistics															
	Fund 60Hz (mG)		2nd (mG)		3rd (mG)		4th (mG)		5th (mG)		6th (mG)		7th (mG)		Total AC (mG)	
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	ı	2	1	2				2	1	
Max	0.222	0.225	0.021	0.022	0.713	0.694	0.020	0.021	0.063	0.057	0.019	0.023	0.027	0.030	0.735	0.717
Median	0.135	0.139	0.008	0.009	0.694	0.674	0.009	0.009	0.045	0.043	0.010	0.010	0.014	0.014	0.709	0.691
Min	0.057	0.061	0.002	0.001	0.673	0.651	0.001	0.002	0.030	0.027	0.002	0.002	0.002	0.003	0.687	0.664
Range	0.165	0.164	0.019	0.021	0.041	0.043	0.019	0.020	0.032	0.030	0.017	0.021	0.025	0.027	0.048	0.052
Std Dev	0.025	0.026	0.003	0.003	0.006	0.006	0.003	0.003	0.004	0.004	0.003	0.003	0.004	0.004	0.008	0.008

Figure 11(d) Location 7: AC and DC Magnetic Field Measurement Results



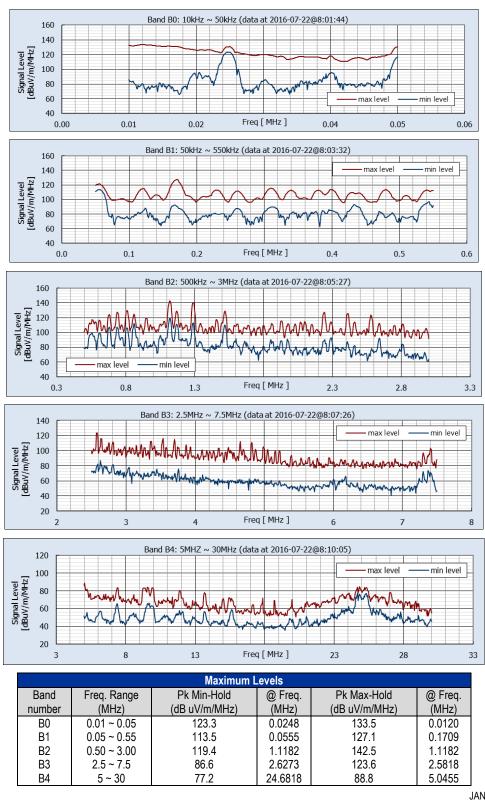


Figure 11(e) Location 7: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4



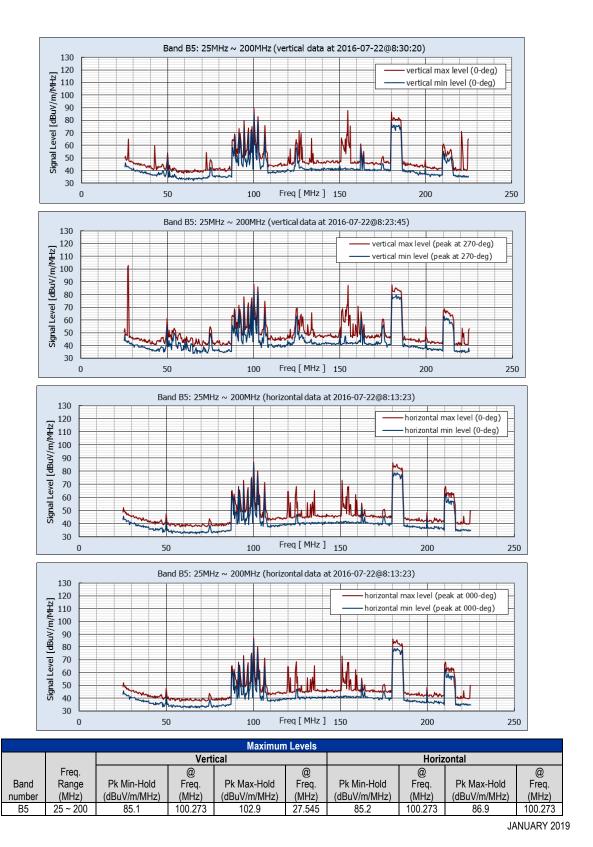



Figure 11(f) Location 7: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

February 2022

California High-Speed Rail Authority



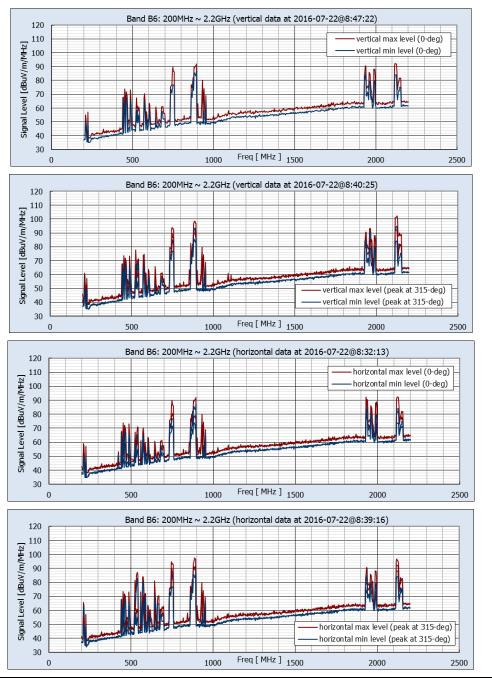


	Maximum Levels													
	Freq.		Ver	tical		Horizontal								
	Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.					
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)					
В6	200 ~ 2200	94.9	2123.636	102.4	2127.273	90.9	883.636	97.5	887.273					

Figure 11(g) Location 7: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



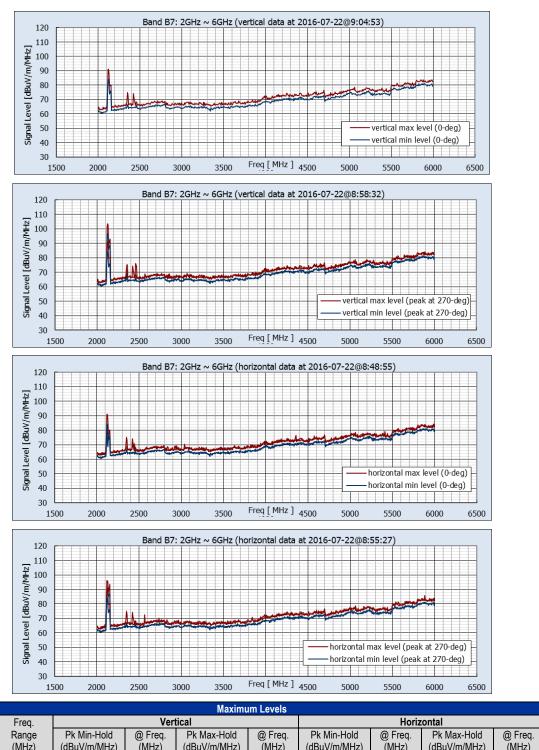

(MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) Band В7 2000~6000 96.8 2123.636 103.5 2123.636 91.6 2123.636 95.9 2116.364

> JANUARY 2019 JANUARY 2020

Figure 11(h) Location 7: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 12(a) Location 8: SR 152/Casa de Fruta Parkway, Hollister

Rural setting adjacent to Casa de Fruta, no visible RF emitters (Lat 36.985247°, Lon -121.383899°)

California High-Speed Rail Authority


February 2022






Figure 12(b) Location 8: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.

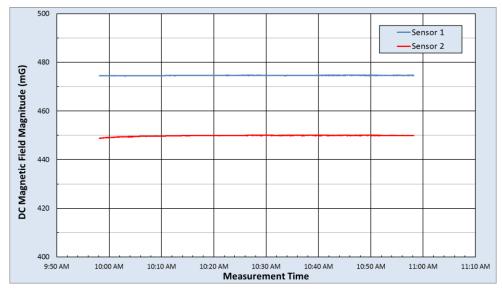

DC Magnetic Field Measurement Statistics												
	B Horizo	ntal (mG)	B Vertic	cal (mG)	B Total (mG)							
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2						
Max	227.4	212.4	417.2	396.9	474.8	450.1						
Median	226.8	212.2	416.9	416.9 396.8		449.9						
Min	226.2	211.2	416.5	395.9	474.4	448.8						
Range	1.1	1.2	0.7	0.9	0.4	1.4						
Std Dev	0.2	***		0.2	0.1	0.2						

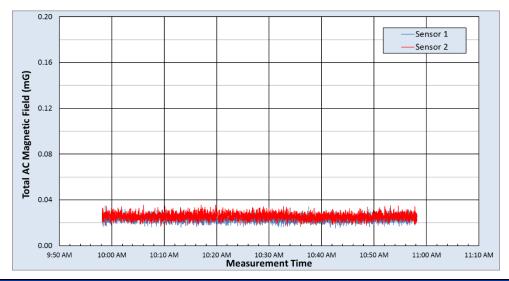

	rms AC Magnetic Field Measurement Statistics															
	Fund 60Hz (mG) 2nd (mG)		3rd (mG)		4th (	4th (mG)		5th (mG)		6th (mG)		7th (mG)		C (mG)		
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2
Max	0.018	0.023	0.019	0.021	0.019	0.018	0.020	0.020	0.018	0.021	0.020	0.022	0.023	0.027	0.035	0.035
Median	0.008	0.009	0.008	0.009	0.008	0.009	0.008	0.009	0.009	0.009	0.009	0.010	0.009	0.010	0.024	0.026
Min	0.002	0.002	0.002	0.002	0.002	0.001	0.001	0.002	0.002	0.002	0.002	0.002	0.002	0.002	0.015	0.017
Range	0.016	0.021	0.017	0.019	0.018	0.017	0.019	0.019	0.016	0.019	0.019	0.020	0.021	0.025	0.019	0.019
Std Dev	0.002	0.003	0.002	0.003	0.002	0.003	0.002	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003	0.003

Figure 12(c) Location 8: AC and DC Magnetic Field Measurement Results



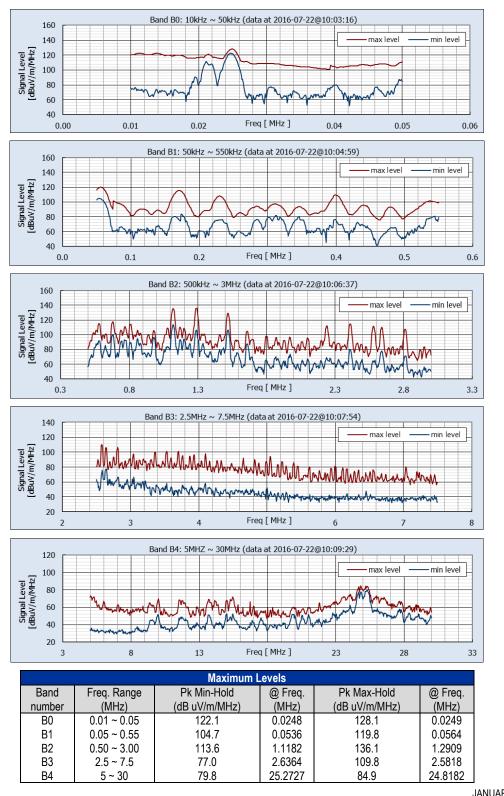


Figure 12(d) Location 8: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4



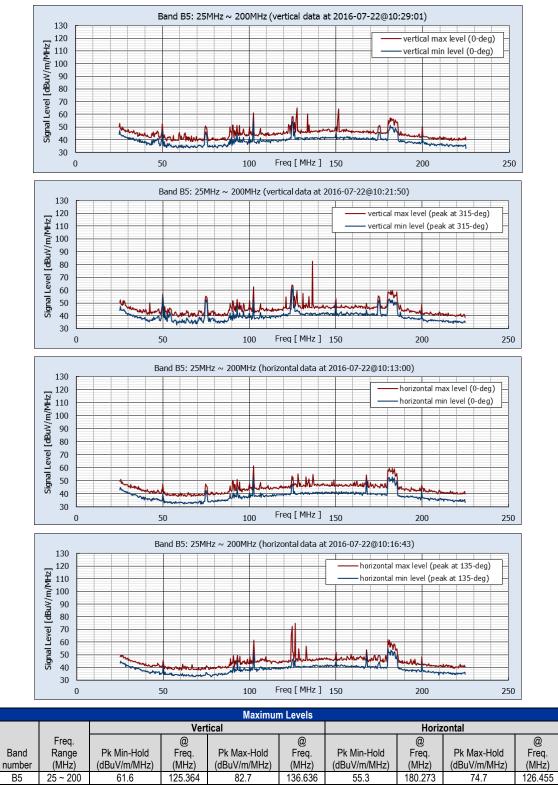


Figure 12(e) Location 8: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation




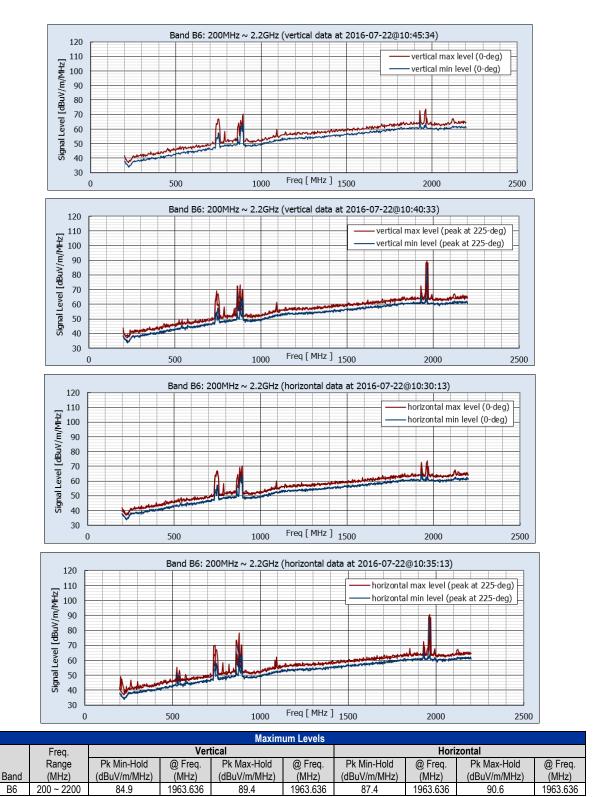


Figure 12(f) Location 8: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

B6



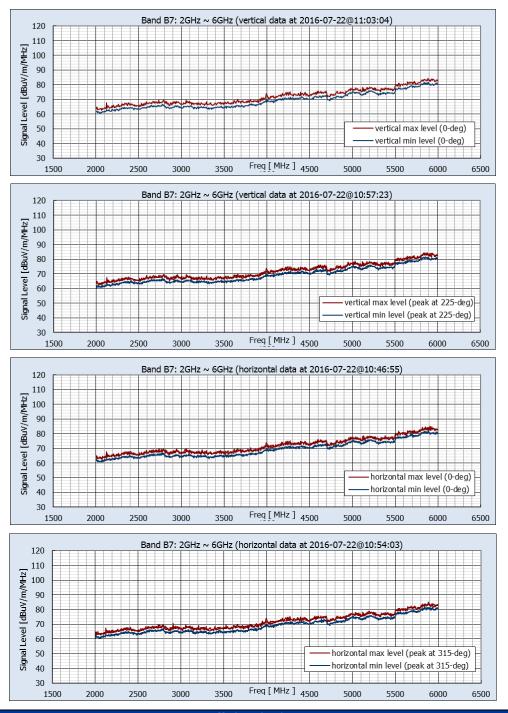

	Maximum Levels												
	Freq.		Ver	tical	Horizontal								
	Range	Pk Min-Hold @ Freq.		Pk Max-Hold @ Freq.		Pk Min-Hold @ Freq.		Pk Max-Hold	@ Freq.				
Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
R7	2000~6000	66.2	265/15/15	68.8	2660 001	66.2	2720 000	68.0	2705.455				

Figure 12(h) Location 8: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 13(a) Location 9: Santa Nella Avenue/Fahey Road, Santa Nella

Rural setting with no visible RF sources (Lat 37.126085°, Lon -121.015302°)

February 2022



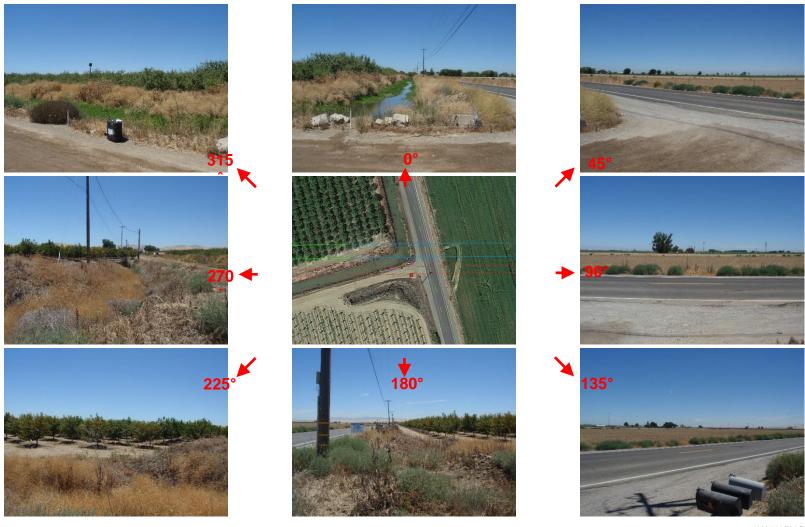


Figure 13(b) Location 9: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.

California High-Speed Rail Authority

February 2022



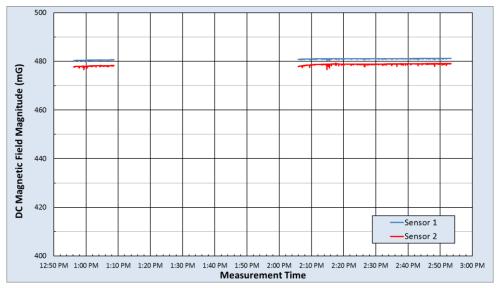





Figure 13(c) Location 9: Local EMF Sources

Nearby emitters include distribution lines perpendicular and parallel to the alignment.

Photos depict visible close-proximity emitters. Other emissions sources may exist, but are not visible from the site.



DC Magnetic Field Measurement Statistics												
	B Horizo	ntal (mG)	B Vertic	al (mG)	B Total (mG)							
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2						
Max	237.7	274.5	418.8	394.3	481.2	479.4						
Median	237.0	273.0	418.6	393.4	481.0	478.8						
Min	235.7	271.5	417.8	391.0	480.0	476.6						
Range	2.0	2.9	1.0	3.3	1.2	2.8						
Std Dev	0.3	0.3	0.2	0.6	0.2	0.4						

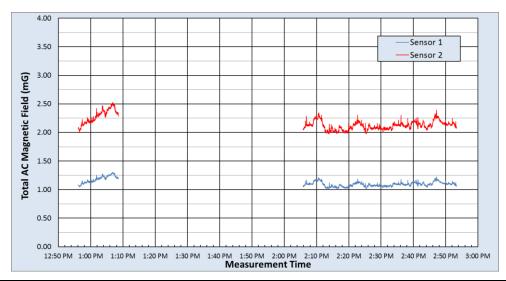

	rms AC Magnetic Field Measurement Statistics																	
	Fund 60Hz (mG)		Fund 60Hz (mG)		2nd (mG)		3rd (mG)		4th (mG)		5th (	(mG)	6th (	mG)	7th (mG)		Total AC (mG)	
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor		
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
Max	1.304	2.526	0.052	0.050	0.054	0.061	0.061	0.060	0.095	0.135	0.069	0.064	0.108	0.139	1.306	2.529		
Median	1.096	2.127	0.010	0.010	0.018	0.026	0.010	0.010	0.046	0.092	0.011	0.011	0.056	0.103	1.098	2.131		
Min	1.012	1.968	0.002	0.002	0.004	0.005	0.002	0.003	0.026	0.054	0.002	0.003	0.031	0.072	1.015	1.974		
Range	0.293	0.558	0.050	0.048	0.050	0.056	0.059	0.057	0.069	0.081	0.067	0.061	0.077	0.067	0.291	0.555		
Std Dev	0.057	0.108	0.003	0.003	0.005	0.009	0.004	0.004	0.006	0.010	0.004	0.004	0.007	0.010	0.057	0.107		

Figure 13(d) Location 9: AC and DC Magnetic Field Measurement Results



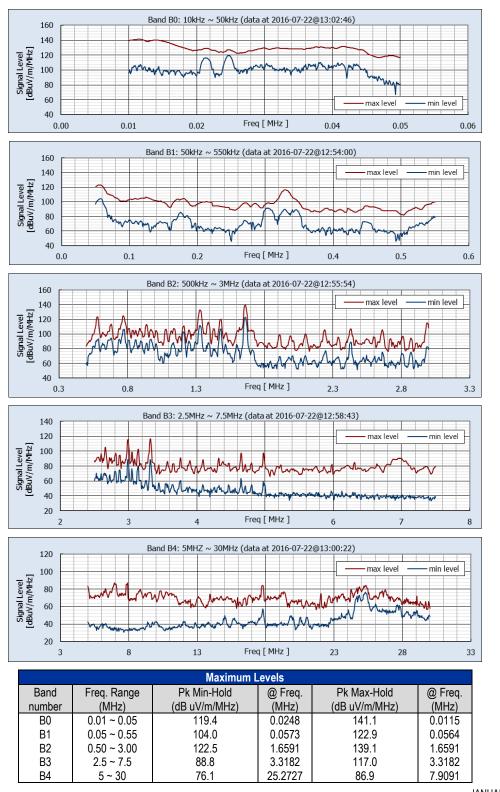


Figure 13(e) Location 9: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4




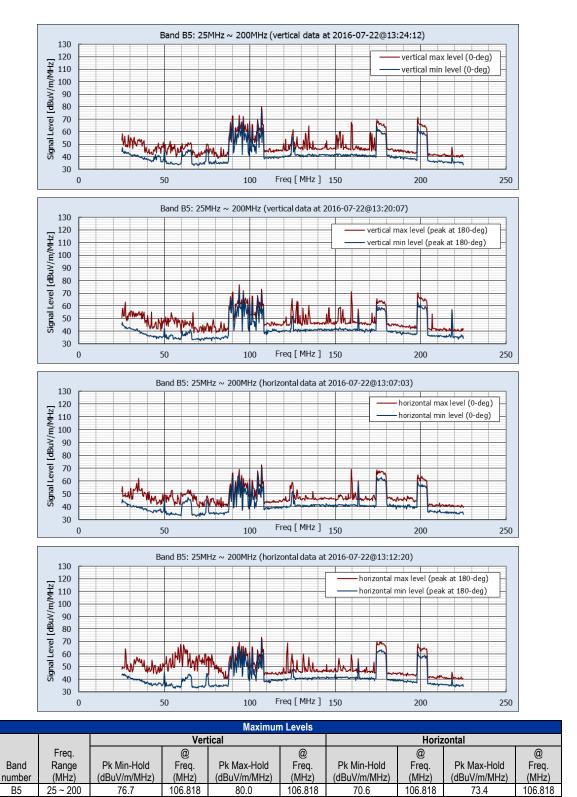


Figure 13(f) Location 9: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



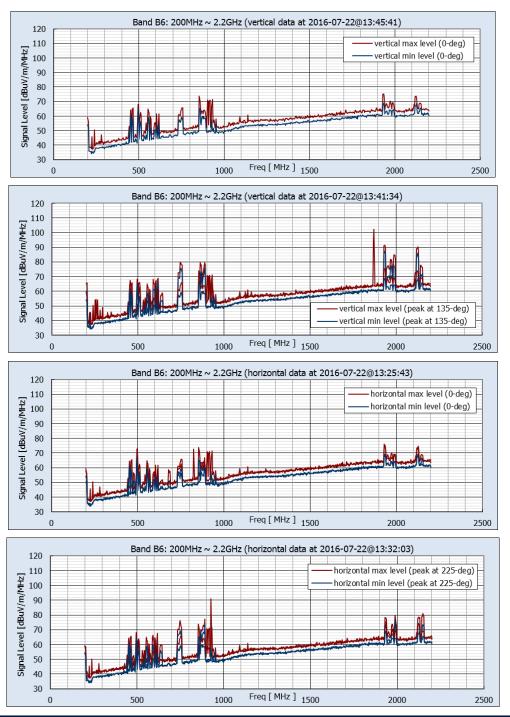


		Maximum Levels													
ſ	·	Freq.		Ver	tical		Horizontal								
		Range	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq.	Pk Max-Hold	@ Freq.					
	Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)					
	B6	200 ~ 2200	87.2	1934.545	102.3	1872.727	76.7	1989.091	91.1	927.273					

Figure 13(g) Location 9: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation



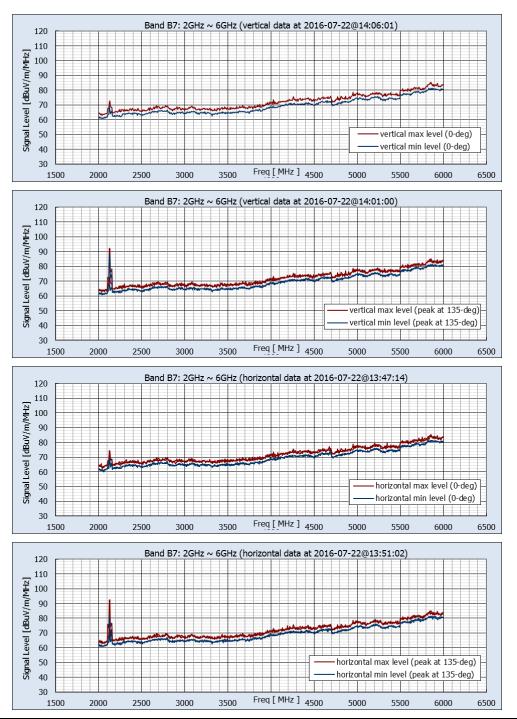

	Maximum Levels													
ſ		Freq.		Vert	tical		Horizontal							
		Range	Pk Min-Hold @ Freq.		Pk Max-Hold	@ Freq.	Pk Min-Hold	@ Freq. Pk Max-Hold		@ Freq.				
	Band	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)	(dBuV/m/MHz)	(MHz)				
ĺ	B7	2000~6000	88.2	2123.636	92.3	2123.636	80.6	2123.636	92.5	2130.909				

Figure 13(h) Location 9: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation





Figure 14(a) Location 10: Henry Miller Road/Carlucci Road, Dos Palos

Rural setting, with one cell tower approximately 3.5 miles distant (Lat 37.097787°, Lon -120.680892°)

February 2022





Figure 14(b) Location 10: Measurement Location and Site Views

Photos depicting the site from the perspective of the RF measurement location. In the center is a satellite view, indicating the alignment (green line) and measurement points (red = RF, magenta = magnetometers). The satellite view is rotated so that the image at 0° faces the alignment.





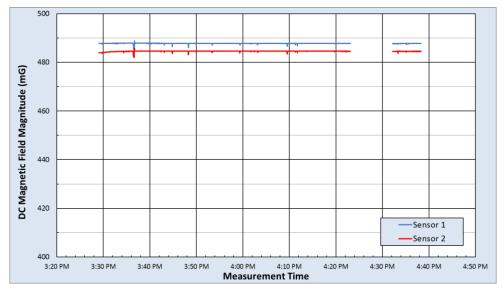





Figure 14(c) Location 10: Local EMF sources

Nearby emitters include distribution lines parallel and perpendicular to the alignment and a distant (3.5 mi) cell tower.

Photos depict visible close-proximity emitters. Other emissions sources may exist that are not readily visible from the site.



DC Magnetic Field Measurement Statistics												
	B Horizo	ntal (mG)	B Vertic	cal (mG)	B Total (mG)							
	Sensor 1	Sensor 2	Sensor 1	Sensor 2	Sensor 1	Sensor 2						
Max	238.2 263.4		427.8	409.3	488.8	485.7						
Median	234.7	260.0	427.6	408.9	487.8	484.6						
Min	229.9	256.1	425.6	406.9	485.2	482.1						
Range	8.3	7.4	2.2	2.5	3.6	3.6						
Std Dev	0.2	0.3	0.1	0.3	0.1	0.1						

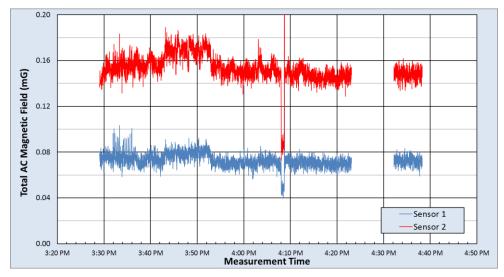

	rms AC Magnetic Field Measurement Statistics																	
	Fund 60Hz (mG)		Fund 60Hz (mG)		2nd	2nd (mG)		3rd (mG)		4th (mG)		mG)	6th (mG)		7th (mG)		Total AC (mG)	
	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor	Sensor		
	1	2	1	2	1	2	1	2	1	2	1	2	1	2	1	2		
Max	0.156	0.361	0.058	0.058	0.055	0.059	0.056	0.059	0.065	0.070	0.068	0.068	0.071	0.065	0.158	0.363		
Median	0.067	0.148	0.009	0.009	0.010	0.011	0.010	0.010	0.013	0.022	0.010	0.010	0.011	0.014	0.073	0.152		
Min	0.032	0.065	0.001	0.002	0.002	0.003	0.002	0.002	0.002	0.009	0.001	0.002	0.002	0.003	0.041	0.073		
Range	0.124	0.297	0.057	0.056	0.053	0.056	0.054	0.057	0.063	0.061	0.067	0.066	0.070	0.062	0.117	0.290		
Std Dev	0.006	0.013	0.003	0.003	0.003	0.004	0.003	0.003	0.004	0.005	0.004	0.004	0.004	0.004	0.006	0.013		

Figure 14(d) Location 10: AC and DC Magnetic Field Measurement Results



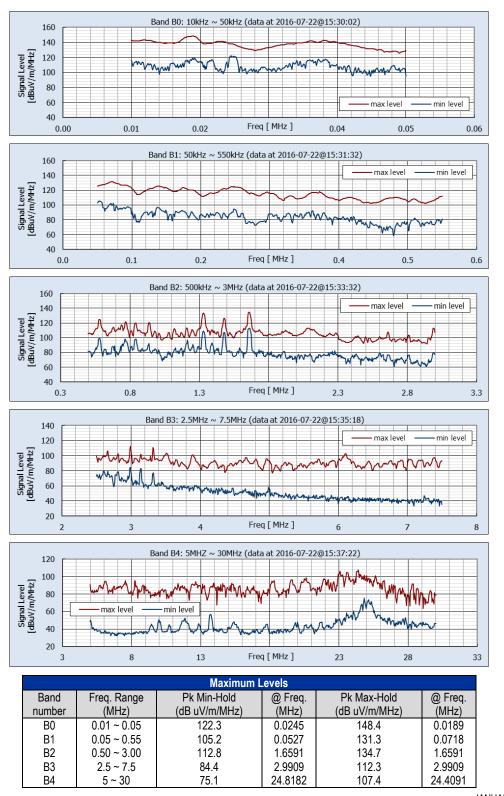


Figure 14(e) Location 10: Measured Environmental RF Levels

Non-Directional Data from Vertically Oriented Monopole Antenna, Bands 0-4

February 2022



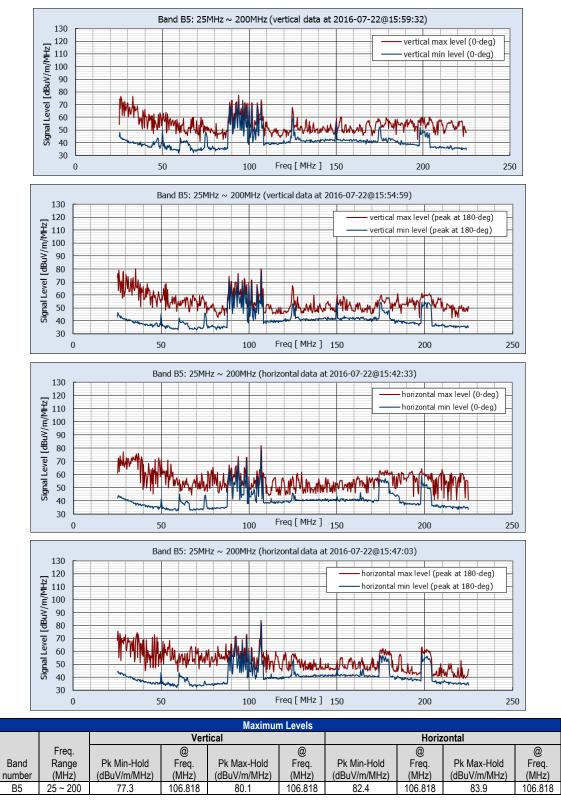


Figure 14(f) Location 10: Measured Environmental RF Levels

Band 5 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

California High-Speed Rail Authority

February 2022




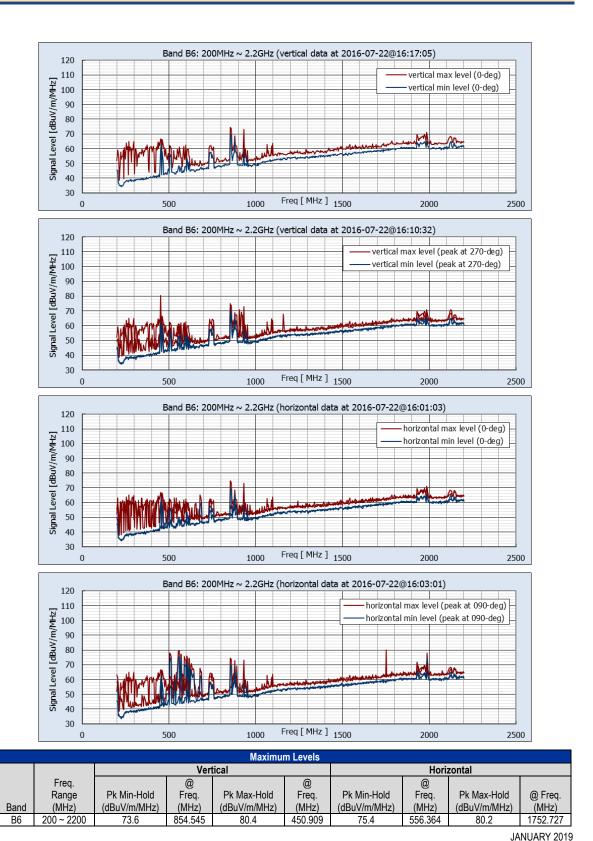


Figure 14(g) Location 10: Measured Environmental RF Levels

Band 6 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation

February 2022



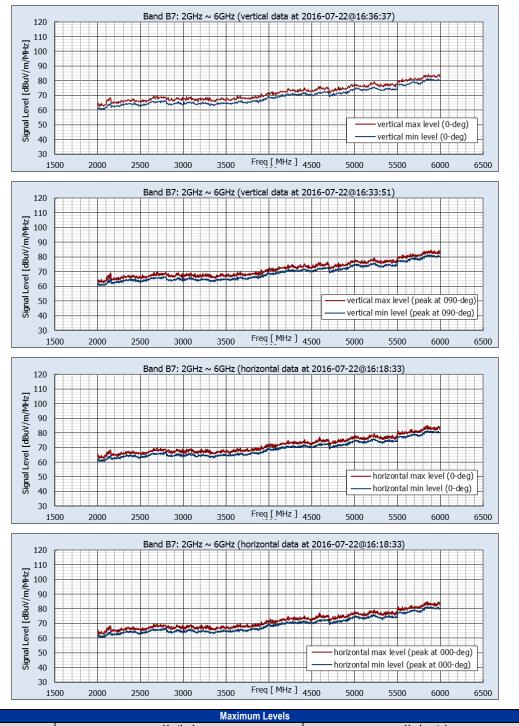

Vertical Horizontal Freq. Range Pk Min-Hold @ Freq. Pk Max-Hold @ Freq. Pk Min-Hold @ Freq. Pk Max-Hold @ Freq. (MHz) (MHz) (dBuV/m/MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) (dBuV/m/MHz) (MHz) Band В7 2000~6000 66.1 2727.273 69.8 2690.909 66.3 2647.273 68.5 2698.182

Figure 14(h) Location 10: Measured Environmental RF Levels

Band 7 Vertical and Horizontal Components, Facing Alignment (0-deg) and at Peak Orientation